


# IMB-152

## Mini-ITX Motherboard

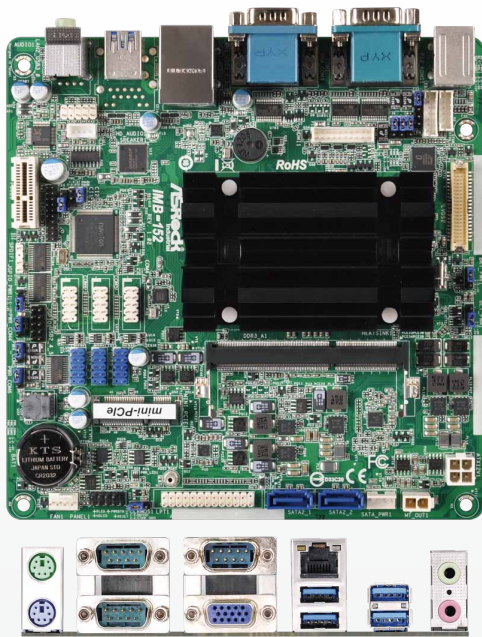

### Spotlight Features

- Intel® Atom™ Baytrail-M/D Processor
- Integrated Intel® Gen7 Intel Graphics DX 11\*, OGL3.2
- Supports Dual Channel DDR3L 1333MHz, 2 x SO-DIMM, up to 4GB system memory
- 1 x HDMI, 1 x D-Sub, 1 x Dual Channel 24-bit LVDS
- 4 x USB 3.0, 6 x USB 2.0, 2 x SATA2
- 1 x mini-PCIe, 1 x PCIe x1 slot
- Gigabit LAN : 1 x Realtek Lan
- 1 x TPM Header
- 12 V DC-in

### Specifications

Processor System	
Dimension	Mini-ITX (6.7-in x 6.7-in)
CPU	Intel® new Atom™ Baytrail-M/D Supports Hyper-Threading Technology Default J1900 Quad core processor
Core Number	(By CPU, Max 4)
Max Speed	(By CPU)
L2 Cache	(By CPU)
Chipset	(By CPU)
BIOS	UEFI
Expansion Slot	
PCI	0
Mini-PCIe	1 (Half Size)
mSATA	0
PCIe	1 (x1)
CFast Card Socket	0
Memory	
Technology	Single Channel DDR3L 1333 MHz SDRAM
Max.	4GB
Socket	1 x SO-DIMM
Graphics	
Controller	Intel® Gen7 Intel Graphics DX 11*, OGL3.2
VRAM	Shared Memory
VGA	Supports max. resolution 1920 x 1200
LVDS	Dual channel 24-bit, max resolution 1920 x 1200@60Hz
HDMI	Supports HDMI 1.4a, max resolution 1920x1200
DVI	No
Display Port	No
Multi Display	Yes (Dual Display)
Ethernet	
Interface	10/100/1000 Mbps
Controller	GbE LAN: 1 x Realtek RTL8111G-CG Optional Support 2 x Realtek RTL811g-CG
Connector	1 x RJ-45 Optional 2 x RJ-45
SATA	
Max Data Transfer Rate	SATA2 (3.0Gb/s)

Rear I/O	
VGA	1
HDMI	1(Pin Header)
DVI-I/D	0
Display Port	0
Ethernet	1 Optional 2
USB	4 x USB 3.0
Audio	2 (Mic-in, Line-out)
Serial	3 x RS-232
e-SATA	
PS/2	2 (1 x keyboard and 1 x mouse)
Internal Connector	
USB	6 ( 3*2.54 pitch header USB 2.0 compliant)
LVDS/Inverter	1/1
VGA	0
Serial	3 (RS-232)
SATA	2 x SATA2 (3.0Gb/s)
m-SATA	0
Mini-PCIe	1
Parallel	1
IrDA	0
GPIO	4 x GPI + 4 x GPO Share with COM 5
SATA PWR Output Con	1
Speaker Header	1
Watchdog Timer	
Output	From Super I/O to drag RESETCON#
Interval	256 segments, 0,1,2...255sec/min
Power Requirements	
Input PWR	12V DC-In (4-pin ATX PWR Con)
Power On	AT/ATX Supported AT : Directly PWR on as Power input ready ATX: Press Button to PWR on after Power input ready
Environment	
Operating Temperature	0°C – 60°C