

Fan-less Barebones SL-7706

Intel Sandy Bridge FAN-LESS System with iAMT
 Wide Range 12V ~ 24V DC power input
 Wide Temperature -20 ~ 60°C,
 Dual Giga LAN & Dual Display; SIM card Holder



Specification


CPU	Intel FCPGA988 and FCPGA988B Core i7/i5/i3/Celeron CPU
Chipset	Intel QM77
BIOS	Phoenix UEFI Flash BIOS
Graphics	Intel GMA HD4000 DX11 GFX core (DVMT 5.0)
iAMT	YES (optional)
TPM	YES (optional)
LVDS	Dual Channel up to 1920x 1080
Display	CRT + DVI or CRT + LVDS
Memory	Up to 16GB SO-DIMM DDR3-1600
Watchdog Timer	Programmable 1~255 seconds /minutes
LAN	2 x Intel Giga LAN
Serial Port	2 x RS-232 w/+5, +12V power selector RS-422/RS-485 via COM2 (optional)
USB 3.0	4
USB 2.0	6
SATA	2
Audio	HD Audio; with 1.2W amplifier

Digital I/O	1 x 8-bit Digital I/O (4 IN / 4 OUT)
SIM Card Holder	YES
Expansion Interface	1 x Mini-PCIe socket
Disk Drive Bay	2.5" HDD/SDD x 1
Mounting Type	VESA-75 / 100 (optional) + BASE-KIT (optional)
Color	Carmine
Power Input	12V~24V DC
Temperature / Humidity	-20~60 (1 year warranty); 0~95% (non-condensing)
Dimensions (D x H x W)	223 x 253 x 110 mm
Weight	System only: 5 Kg / each With Packing: 6 Kg / each

Ordering Information

- SL-7706 : Fan-less System

Related Products

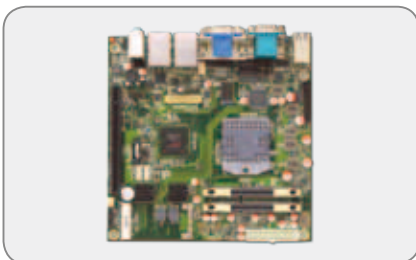

Intel Core i7/i5/i3 P.13



AC-DC Adaptor P.53/54



Wifi / GSM Module