


RC-725

19" 2U High, Full-size Rackmount Chassis with 6-slot Backplane, 300W/400W ATX P/S
Provides PICMG1.3 Full-size Backplane

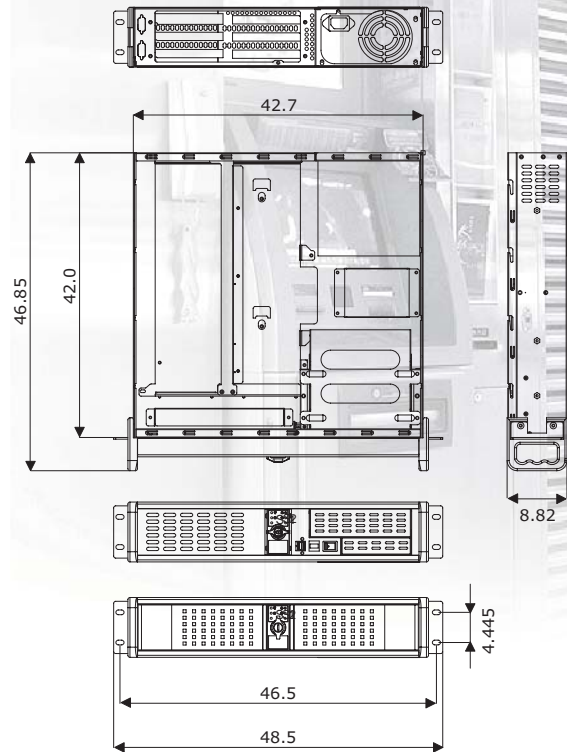

Features

- 19" 2U high, rackmount chassis compliant to EIA RS-310C standard
- Detachable card cage for easy installation and maintenance
- Provides 6-slot backplane, 300W/400W ATX power supply
- 1 x external 5.25" CD-ROM space, 1 x external 3.5" FDD/HDD space, 1 x internal 3.5" HDD space
- 2 x 8cm ball bearing cooling fan
- Dual lockable latch doors
- FCC/CE industrial Class A approval

Display

Chassis

Meets EIA RS-310C 19" 2U high, rackmount standard; heavy-duty steel, SECC 1.2t (Japan)

Drive Space

External: 1 x 5.25" CD-ROM space + 1 x 3.5" FDD/HDD space
Internal: 1 x 3.5" HDD space

Front Panel

Power switch, reset button; power and HDD active LED

Thermal Solution

2 x 8cm ball bearing cooling fan and removable air filter

Altitude

15,000 feet

Power Supply

300W/400W ATX power supply

Temperature

0~+50°C (operating); 0~+70°C (storage)

Humidity

5~95%; non-condensing

Safety Standard

FCC/CE on chassis and FCC/CE/UL/TUV on power supply

Dimensions (LxWxH)

42.0 x 42.7 x 8.82 cm

Ordering Guide

RC-725B

19" 2U High, Full-size Rackmount Chassis

RC-725BB-6SD2

RC-725B Chassis w/HPCI-6SD2 B/P, 300W ATX P/S

RC-725BC-5SD

RC-725B Chassis w/PCIE-5SD B/P, 400W ATX P/S