


FUNDAMENTAL BUILDING BLOCK OF INTERNET APPLIANCE

# CONCORD

4U, 19" RACK-MOUNT CHASSIS ECR9400/9401/9402

- High security
- Excellent thermal solution
- With dust proof, lockable front door
- Supports ATX motherboard or full size micro ATX motherboard up to 12"x13"
- Available for PS2 type or mini redundant : hot-swap, hot-plug power supplies
- Easy Accessed Control & Alarm Panel
- Meets CE, FCC requirements



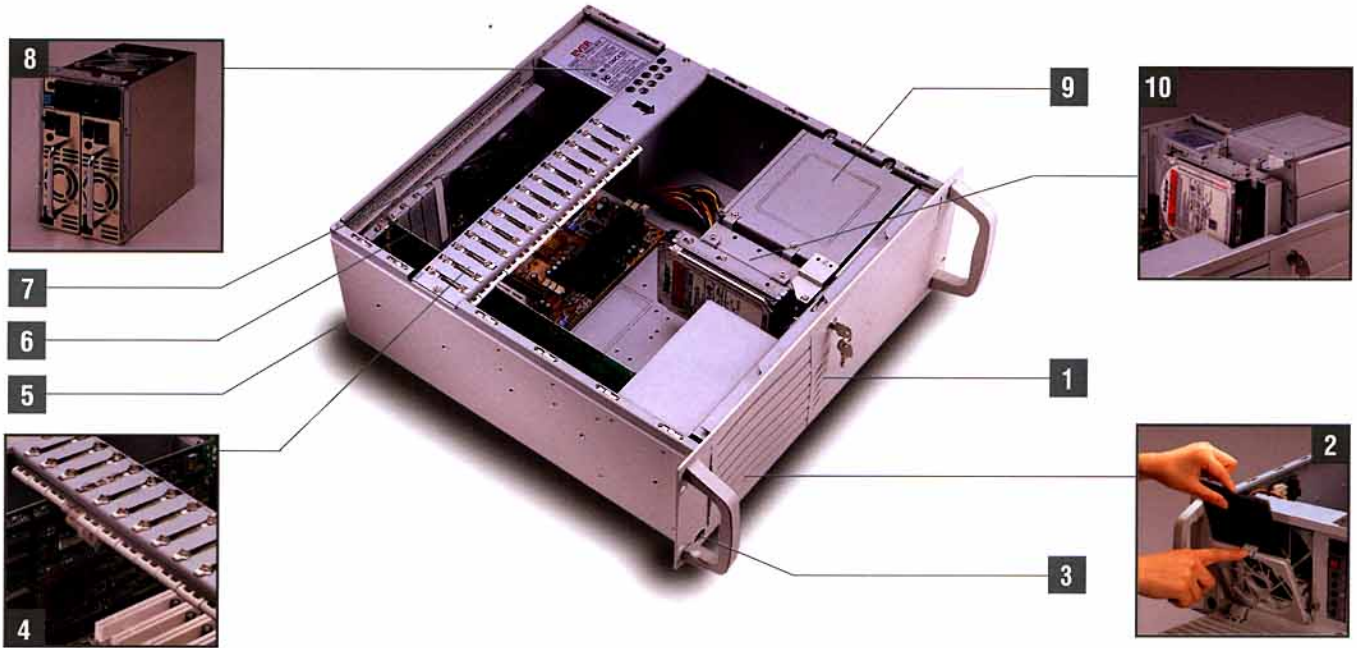

### Quick View

- 1** Easy Accessed Control & Alarm Panel :
  - Power ON/OFF switch comes with LED indicator.
  - System reset button.
  - HDD LED.
  - Fan fail LED.
  - Two thermal LEDs.
  - Fan & Thermal Alarm Reset button.
- 2** 12 cm ball-bearing cooling fan with an easy-access removable air filter.
- 3** An extended standard 5-pin AT K/B connector.
- 4** Special designed hold-down card retainer.
- 5** A variety of back windows.
- 6** PS/2 converts to AT type keyboard connector.
- 7** Convertible ventilation / connector bar at rear panel.
- 8** Power supply : for both normal PS/2 PSU and PS/2 type mini-redundant PSU.
- 9** Rubber cushions buffering the vibration for drive module.
- 10** Modular shock-resistant frames for HDD/FDD.

### Specifications

Model No.	ECR9400	ECR9401	ECR9402
<b>Drive Space:</b>	5.25" (Exposed)x3 3.5" (Exposed)x1 2 Hidden 3.5" Bays For 1" (H)x2 or 1.625" (H)x1 HDD		
<b>Mainboard:</b>	ATX M/B	14-slot Backplane	AT M/B (8/12 Slot)
<b>Power Supply:</b>	PS/2 or PS/2 Type Mini-redundant Power Supply up to 300W		
<b>Ventilation:</b>	12 cm Ball-bearing Cooling Fan		
<b>Options:</b>	<b>1</b> Thermal-control Board		
	<b>2</b> 6 cm Fan x2	N/A	N/A
	<b>3</b> Card Holder	Card Holder	Card Holder
<b>Measurement:</b>	483 mm (W) x 470 mm (D) x 177 mm (H) 19.0" (W) x 18.5" (D) x 7.0" (H)		
<b>Weight (N/W,G/W):</b>	14.5/17.5 KGS ( 31.9/38.5 LBS )		
<b>Standard Packing:</b>	1PC/CTN/3.8 CUFT., 20/40FT CTNR: 273/559 PCS		

