



ENDAT-2794A

Intel Atom N270 1.6GHz fan-less CPU
Support dual display

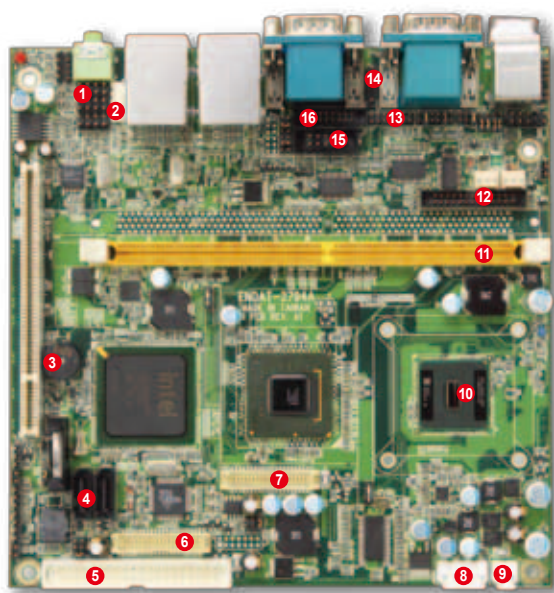

- | | | |
|---|---|---|
| 1 CD-In Pin header
Line-In Pin Header
SPK-out Pin Header
Mic-In Pin Header | 5 40 Pin IDE
6 LVDS 2
7 LVDS 1
8 HDD Power
9 DC 12V Input
10 Intel Atom N270
1.6G CPU | 11 240 Pin DDR2 Socket
12 LPT Box Header
13 DIO
14 IrDA Pin Header
15 COM 4 Box Header
16 VGA Box Header |
|---|---|---|

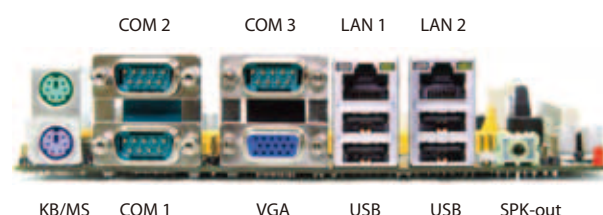

Specification

CPU	Intel Atom N270 (1.6GHz)
Chipset	Intel 945GSE + ICH7-M
BIOS	Award BIOS
Graphics	Intel GMA 950
LVDS	18/36 LVDS + 18/24/36/48 bit LVDS (optional)
Display	VGA + DVI or LVDS + LVDS or VGA + LVDS
Memory	Up to 2GB DDR2-533
WDT	Programmable 1~255 seconds /minutes
LAN	2 x Realtek Giga LAN
Serial Port	4 x RS-232 w/+5, +12V power selector RS-422/RS-485 via COM2 (optional)
Parallel	1 (Optional via cable)
USB	6
SATA	2
Audio	HD Audio; with 1.2W amplifier
KB/MS	PS2 connector and pin header

Digital I/O	1 x 8-bit Digital I/O (4 IN / 4 OUT)
Expansion Interface	1 x PCI
Power Input	12V DC
Temperature / Humidity	0~60 °C; 0~95% (non-condensing)
Dimensions (L x W)	170 x 170 mm

Ordering Information

- ENDAT-2794A
w/ CRT + 18/36 bit LVDS
- ENDAT-2794A-L
w/ CRT + 18/24/36/48 bit LVDS + 18/36 bit LVDS
- ENDAT-2794A-D
w/ CRT + DVI
- ENDAT-2794A-1R
w/ CRT + 18/36 bit LVDS; LAN x 1
- ENDAT-2794A-1R-L
w/ CRT + 18/24/36/48 bit LVDS + 18/36 bit LVDS; LAN x 1
- ENDAT-2794A-1R-D
w/ CRT + DVI; LAN x 1


Related Products



Barebones P.42



Barebones P.39

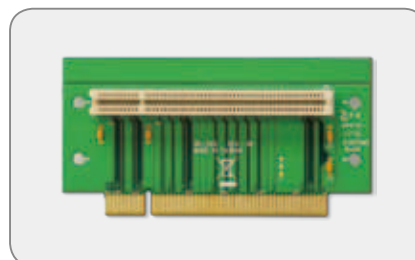

Riser card P.50