



ENDAT-3568i

Industrial grade Intel Core 2 Quad LGA 775
Mini ITX

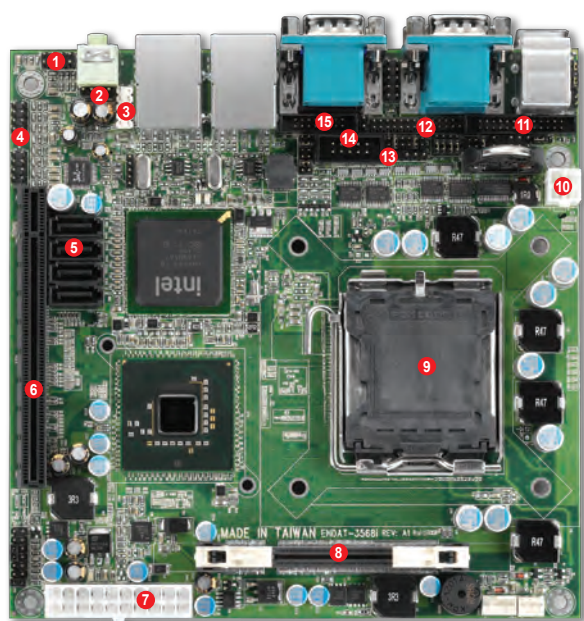

- | | | |
|----------------------|-----------------------|---------------------|
| 1 CD-In Pin Header | 6 PCIe 16X Slot | 11 LPT Box Header |
| 2 Line-In Pin Header | 7 ATX Power Connector | 12 DIO |
| 3 SPK-out Pin Header | 8 DDR2 SO-DIMM Socket | 13 IrDA Pin Header |
| 4 USB x 2 | 9 Intel LGA775 | 14 COM 4 Box Header |
| 5 Mic-In Pin Header | CPU Socket | 15 VGA Box Header |
| 6 S-ATA x 4 | 10 4Pin ATX Power | |

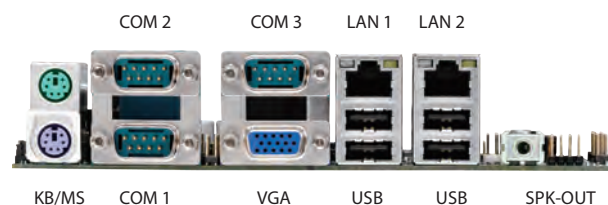

Specification

CPU	Intel Core 2 Quad, Core 2 Duo, Pentium Dual-Core, Celeron Processor
Chipset	Intel Q35 + ICH9
BIOS	Award BIOS
Graphics	Intel GMA 3100 WITH DVMT support
LVDS	Via display kit (Optional)
Display	VGA
Memory	Up to 2GB SO-DIMM DDR2-800
WDT	Programmable 1~255 seconds
LAN	2 x Realtek Giga LAN
Serial Port	4 x RS-232 w/+5, +12V power selector RS-422/RS-485 via COM2 (optional)
Parallel	1 (Optional via cable)
USB 2.0	6
SATA	4 x SATA

Audio	HD Audio; with 1.2W amplifier
KB/MS	PS2 connector and pin header
Digital I/O	8-bit Digital I/O (4-bit IN / 4-bit OUT)
Expansion Interface	1 x PCI-E
Power Input	ATX
Temperature / Humidity	0~60 °C; 0~95% (non-condensing)
Dimension (L x W)	170 x 170 mm


Ordering Information

- UC-SDL2-D: DVI
- UC-SDL2-DL: DVI + LVDS
- UC-SDL2-T: TV out
- UC-SDL2-L: LVDS
- UC-SDL2-2L: Dual LVDS
- UC-SDL2-C: CRT

Related Products



1U Barebones P.45

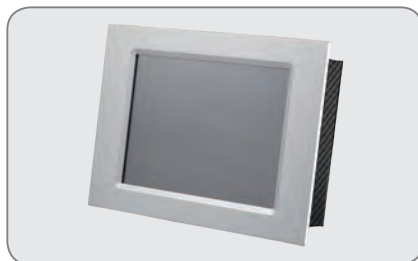

Panel PC P.34



Riser card P.50