



ENDAT-7701

Intel Sandy Bridge with iAMT
Dual Intel Giga LAN
Dual Display up to 1920 x 1080

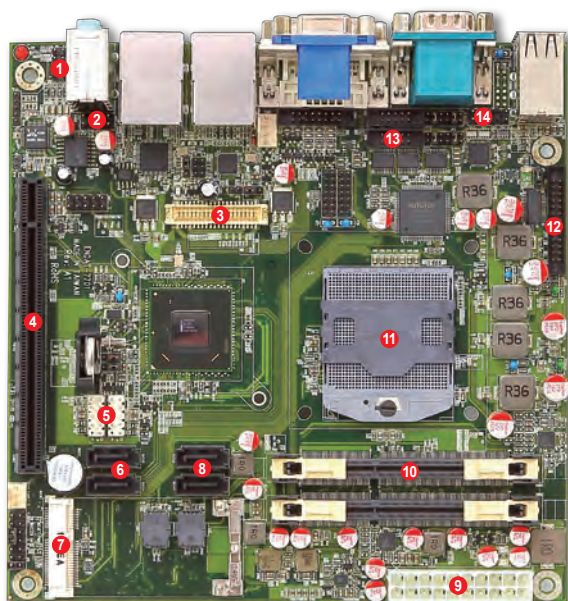

- 1 CD-In Pin Header
- 2 Line-In Pin Header
- 3 LVDS
- 4 PCI-E 16X Slot
- 5 USB x4
- 6 SATA 2 x2
- 7 Mini PCI-E
- 8 SATA 3 x2
- 9 ATX Power Connector
- 10 DDR3 SO-DIMM Socket
- 11 Intel Socket 988B
- 12 LPT Box Header
- 13 COM 3~4 Box Header
- 14 PS2 KB/MS Pin Header

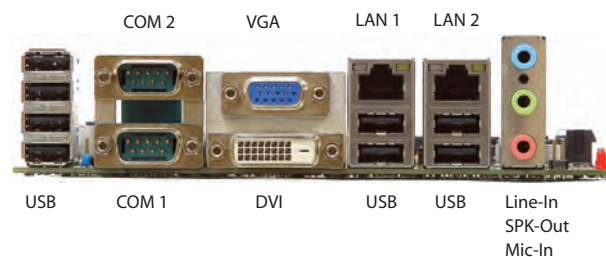

Specification

CPU	Supports Intel FCPGA988 Core i7/i5/i3/ Celeron CPU
Chipset	Intel QM67
BIOS	Phoenix UEFI Flash BIOS
Graphics	Intel GMA HD3000 DX11 GFX core (DVM T 5.0)
LVDS	Dual Channel up to 1920x 1080
Display	CRT + DVI or CRT + LVDS
Memory	2 Sockets Up to 16GB SO-DIMM DDR3-1600
WDT	Programmable 1~255 seconds /minutes
LAN	2 x Intel Giga LAN
Serial Port	4 x RS-232 w/+5, +12V power selector RS-422/RS-485 via COM2 (optional)
Parallel	1 (Optional via cable)

USB 2.0	12
SATA	4
Audio	HD Audio; with 1.2W amplifier
Digital I/O	1 x 8-bit Digital I/O (4 IN / 4 OUT)
Expansion Interface	1 x PCI-E + 1 x Mini-PCIe socket
Power Input	ATX
Temperature / Humidity	0~60 °C; 0~95% (non-condensing)
Dimensions (L x W)	170 x 170 mm


Ordering Information

- ENDAT-7701 : CRT + DVI or CRT + LVDS


Related Products



Barebones P.37

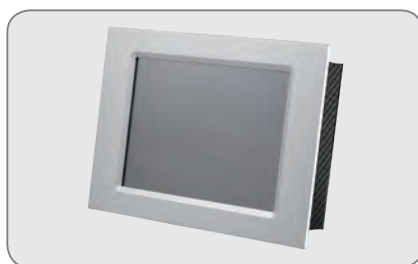

Panel PC P.34

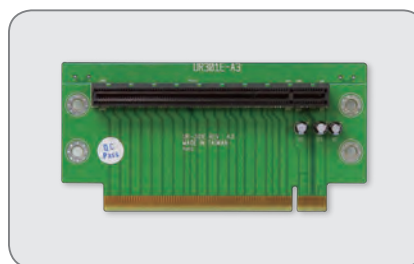

Riser card P.50