



ENDAT-7703

Intel Ivy Bridge with iAMT
Dual Intel Giga LAN
Dual Display up to 1920 x 1080

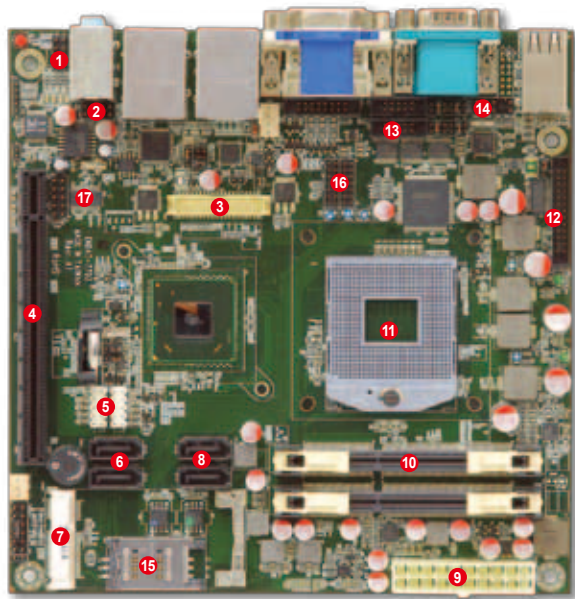

- | | | |
|---|-----------------------------|----------------------------------|
| 1 Line-In Pin Header
Mic-In Pin Header | 6 SATA 2 x2
7 Mini PCI-E | 13 COM 3~4 Box Header |
| 2 CD-In Pin Header
SPK-out Pin Header | 8 SATA 3 x2 | 14 PS2 KB/MS Pin Header |
| 3 LVDS | 9 ATX Power Connector | 15 SIM Card Holder
(Optional) |
| 4 PCI-E 16X Slot | 10 DDR3 SO-DIMM Socket | 16 4 In/out DIO |
| 5 USB x4 | 11 Intel Socket 988B | 17 TPM(Optional) |
| | 12 LPT Box Header | |

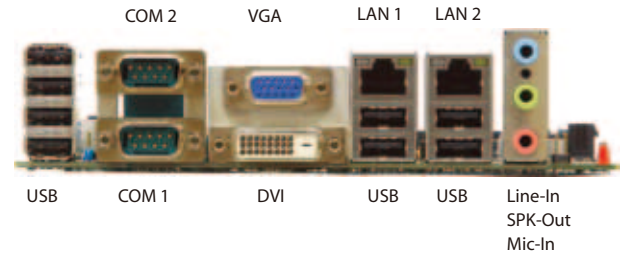

Specification

CPU	Supports Intel Core i7/i5/i3/Celeron CPU FCPGA988 and FCPGA988B
Chipset	Intel QM77
BIOS	Phoenix UEFI Flash BIOS
Graphics	Intel GMA HD4000 DX11 GFX core (DVM 5.0)
LVDS	Dual Channel up to 1920x 1080
Display	CRT + DVI or CRT + LVDS or DVI + LVDS
Memory	2 Sockets Up to 16GB SO-DIMM DDR3-1600
WDT	Programmable 1~255 seconds /minutes
LAN	2 x Intel Giga LAN
Serial Port	3x RS232 and 1x RS-232/422/485 (to be configured by BIOS Selection); w/+5V, +12V power selector.
Parallel	1 (Optional via cable)
USB 3.0	4

USB 2.0	8
SATA	4
Audio	HD Audio; with 1.2W amplifier
Digital I/O	1 x 8-bit Digital I/O (4 IN / 4 OUT)
SIM Card Holder	YES (Optional)
Expansion Interface	1 x PCI-E + 1 x Mini-PCIe socket
Power Input	ATX
Temperature / Humidity	0~60 °C; 0~95 % (non-condensing)
Dimensions (L x W)	170 x 170 mm


Ordering Information

- ENDAT-7703 : CRT + DVI or CRT + LVDS or DVI + LVDS


Related Products



Barebones P.38

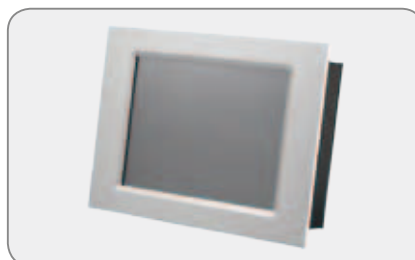

Panel PC P.32

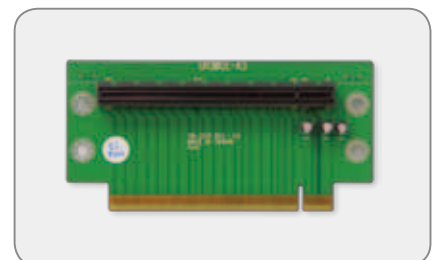

Riser card P.51