



ENDAT-K1001

AMD AM3 Mini-ITX with ATI Radeon HD3200
DC 24V input; with eSATA
Dual Display: VGA + DVI-D, VGA + LVDS

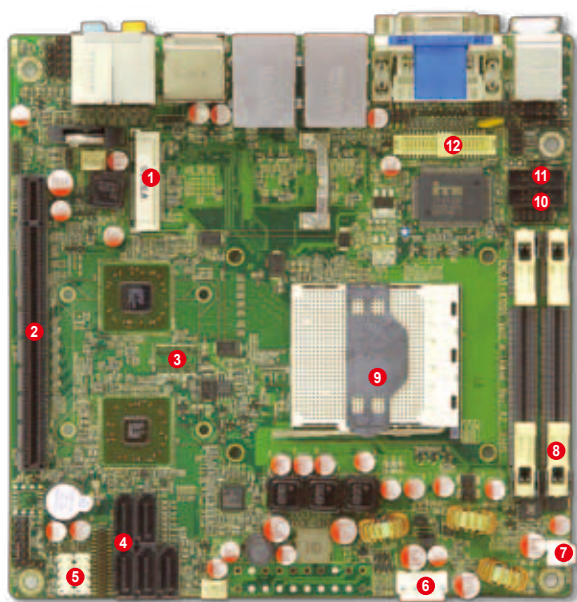

- | | | |
|----------------------------|---------------------------------|---------------------|
| 1 Mini PCI-e | 6 HDD Power | 11 COM 1 Box Header |
| 2 PCI-E 16X Slot | 7 DC 24V Input | 12 LVDS |
| 3 Local 128MB Frame buffer | 8 DDR2 SO-DIMM Socket | |
| 4 SATA x5 | 9 AMD AM2/ AM2+/ AM3 CPU socket | |
| 5 USB x4 | 10 COM 2 Box Header | |

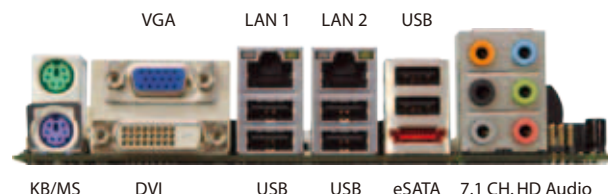

Specification

CPU	Support AMD socket AM2 / AM2+ / AM3 (PhenomX4 / PhenomX3 / Athlon64X2 / Athlon64 / Sempron) CPU
Chipset	AMD RS780E+SB710
BIOS	AMI
Graphics	ATI Radeon HD3200 DirectX 10.0 IGP with 128MB frame buffer
LVDS	Dual Channel up to 1920x 1080 with Backlight Control
Display	VGA + LVDS, VGA + DVI
Memory	2 Sockets Up to 8GB SO-DIMM DDR2-800
WDT	Programmable 1~255 seconds
LAN	2 x Realtek Giga LAN
Serial Port	2 x RS-232
USB 2.0	6
SATA	5 x SATA, 1 x eSATA

RAID	RAID 0/1/10
Audio	HD Audio 7.1 channels
KB/MS	1
Digital I/O	8-bit Digital I/O (4-bit IN / 4-bit OUT)
Expansion Interface	1 x PCI-E 1 x Mini-PCIe socket
Power Input	ATX or 24V DC
Temperature / Humidity	0~60 °C; 0~95% (non-condensing)
Dimensions (L x W)	170 x 170 mm

Ordering Information

- ENDAT-K1001: Supports dual view (CRT + LVDS or CRT + DVI); ATX Power Input
- ENDAT-K1001W: Supports dual view (CRT + LVDS or CRT + DVI); 24VDC Power Input


Related Products



Barebones P.38



1U Barebones P.46

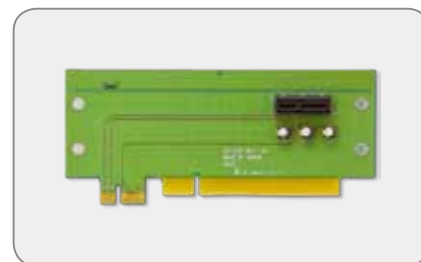

Riser card P.51