


Fan-less Barebones S-7706



*Intel Sandy Bridge FAN-LESS System with iAMT
Wide Range 12V ~ 24V DC power input
Wide Temperature -20 ~ 60°C,
Dual Giga LAN & Dual Display; SIM card Holder*

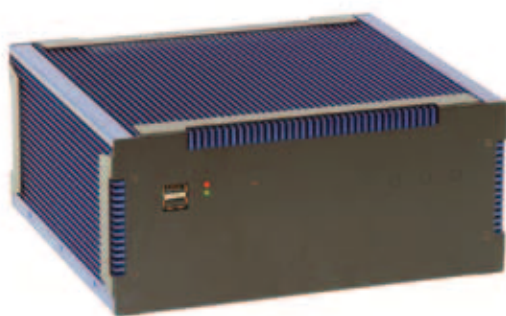

Specification


CPU	Intel FCPGA988 Core i7/i5/i3/Celeron CPU
Chipset	Intel QM77
BIOS	Phoenix UEFI Flash BIOS
Graphics	Intel GMA HD4000 DX11 GFX core (DVM T 5.0)
iAMT	YES (optional)
TPM	YES (optional)
LVDS	Dual Channel up to 1920x 1080
Display	CRT + DVI or CRT + LVDS
Memory	Up to 16GB SO-DIMM DDR3-1600
Watchdog Timer	Programmable 1~255 seconds /minutes
LAN	2 x Intel Giga LAN
Serial Port	2 x RS-232 w/+5, +12V power selector; optional for extra 2 (via cable) RS-422/RS-485 via COM2 (optional)
Parallel	1 (optional via cable)
USB 3.0	4
USB 2.0	8
SATA	2

Audio	HD Audio; with 1.2W amplifier
Digital I/O	1 x 8-bit Digital I/O (4 IN / 4 OUT)
SIM Card Holder	YES
Expansion Interface	1 x PCI-E or PCI; 1 x Mini-PCIe socket; optional for 2 x PCI
Disk Drive Bay	2.5" HDD/SSD x 1
Mounting Type	VESA-75 / 100 (optional) + BASE-KIT (optional)
Color	Sapphire Blue
Power Input	12V~24V DC
Temperature / Humidity	-20~60°C; 0~95% (non-condensing)
Dimensions (D x W x H)	223 x 253 x 110 mm
Weight	System only: 6.5 Kg / each With Packing: 7.5 Kg / each

Ordering Information

- S-7706 : One Expansion Slot
- S-7706-E2P2: Support 2 PCI cards

Related Products

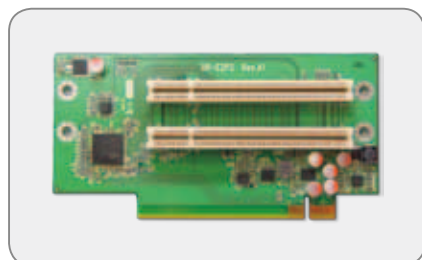

Riser card P.52



AC-DC Adaptor P.53/54



Wifi / GSM Module