

Features



- Fanless Design
- Intel® Atom™ N270 1.6GHz Processor, FSB 533MHz
- One 200-pin SO-DIMM socket, up to 2GB DDR2 533MHz SDRAM
- IP 65 compliant except I/O side
- Sealed 5-Wire Resistive Touch Screen, Optional for GFG Resistive Touch Screen
- 11~32V DC wide-ranging power input



Specifications



System

Processor	Intel® Atom™ N270 1.6GHz Processor built-in, FSB533MHz
System Memory	1 x 200-pin SO-DIMM socket, support 533MHz up to 2GB SDRAM
System Chipset	Intel® 945GSE + ICH7M
External I/O Port	- 2 x RJ-45 ports - 4 x USB ports - 1 x DB-9 RS-232 (COM 1) - 1 x DB-9, COM2 (RS-232/422/485 selection, default RS-232) - 1 x DB-15 VGA - 1 x Audio MIC, Line-in, Line-out - 1 x Power Switch (ATX) - 1 x 3-pin DC Power input terminal
Solid Storage Disk	1 x 2.5" SATA HDD 1 x Internal CF slot
Expansion Slots	None
OS Support	Windows® XP Pro, XP Embedded

LCD

Display Type	15" TFT-LCD
Max. Resolution	1024x768
Max. Color	262K
Luminance (cd/m²)	350
View Angle	H:140° / V:120°
Backlight Lifetime	50,000 hrs

Touch Screen

Type	Analog resistive
Light Transmission	80%


Power Supply

Power Input	DC 11~32V
-------------	-----------

Mechanical

Construction	Stainless steel front bezel and Aluminum extrusion back cover
IP Rating	IP 65 except I/O side
Mounting	Panel / VESA 75 x 75 Mount
Dimension	398(W)x316(H)x67(D)mm
Net Weight	9.61kgs

Dimension

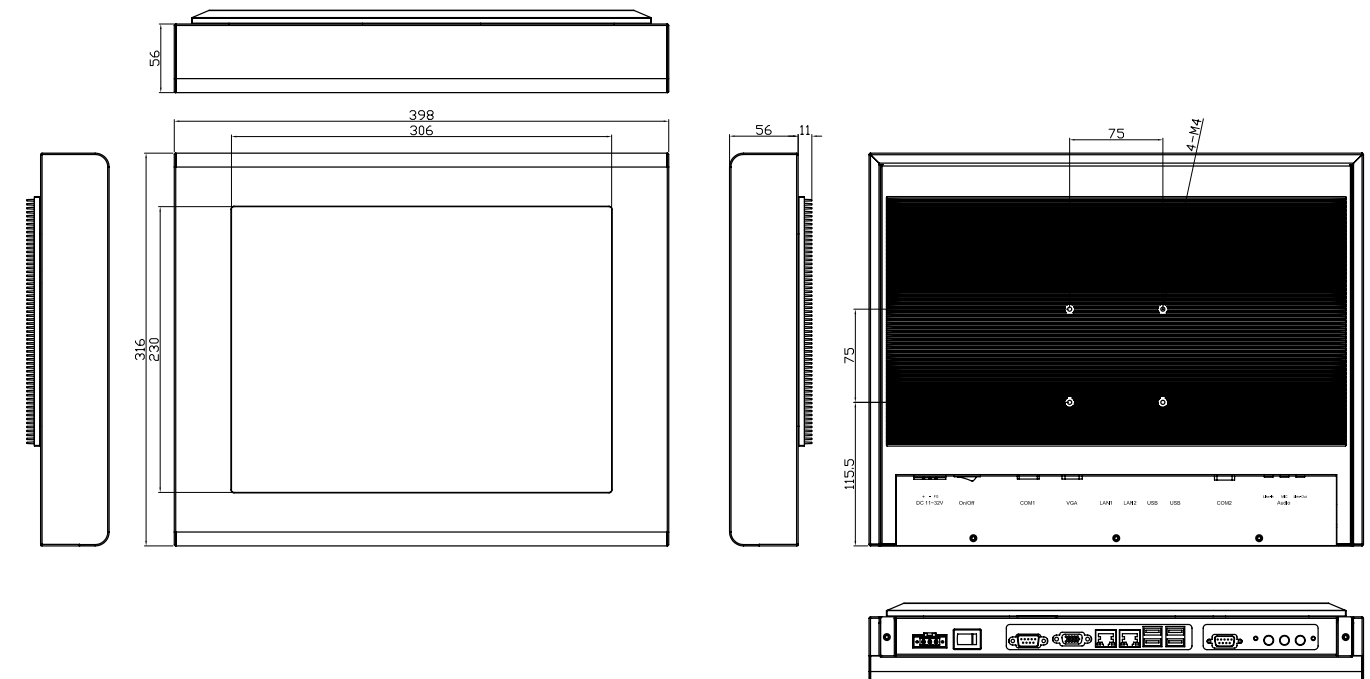

Environmental

Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C non-condensing
Certificate	Meet CE/FCC Class A

Ordering Information

APC-3584T	15" Intel N270 1.6GHZ Ultra Slim IP65 Stainless Steel Fanless Panel PC w/Touch Screen
-----------	---