


Industrial Panel PC

19" Slim / All in One Panel PC with 1 x PCI Slot

APC-3917

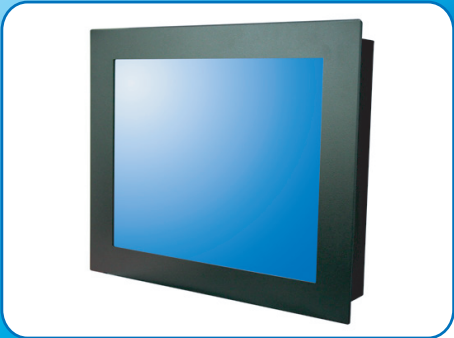

Features

- 19" Slim / All in One Panel PC
- Support Intel Socket P Core 2 Duo Processor, up to T7250 Processor (2M Cache, 2.00 GHz, 800 MHz FSB)
- 19" High brightness (300cd/m²) TFT LCD with resolution of 1280x1024
- Support 1 x PCIe Mini Card socket onboard
- Support 1 x PCI slot
- Space for 1 x 2.5 SATA HDD and 1 x internal CF slot
- Sealed resistive touch screen (optional)
- Support panel mount and VESA 75 mount
- DC 11~32V power input

System Specifications

CPU	Intel Socket P Core 2 Duo Processor, up to T7250 Processor (2M Cache, 2.00 GHz, 800 MHz FSB)
DRAM	2 x 240-PIN Dual channel DDRII 533/667MHz up to 4GB
Storage	Space for 1x 2.5" SATA HDD, 1 x Internal CF slot
I/O Ports	3 x COM (RS-232), 1 x PS/2 keyboard, 1 x PS/2 mouse, 1 x VGA , 2 x LAN (GbE), 1 x Audio Mic, Line-out, 4 x USB 2.0
Expansion	1 x PCI slot
Fanless / Fan	Fanless
Touch screen	Analog resistive (optional)
OS Support	Microsoft Windows XP Pro, XP Embedded

Display Specifications

LCD	19" SXGA
Resolution	1280x1024
Luminance (cd/m ²)	300
Dimension	484(W)x400(H)x94.3(D)mm
Backlight Lifetime	50,000hrs

Mechanical Specifications

Construction	Heavy-duty steel chassis (Black color), Stainless steel front bezel (optional)
Power Supply	DC 11~32V
Operating Temperature	0~50 °C (32~122°F)
Storage Temperature	-20~60 °C (-4~140°F)
Relative Humidity	10~90% @40 °C, Non-condensing
Vibration	5~17Hz, 0.1" double amplitude peak to peak, 17-640Hz, 1.5G acceleration peak to peak
Shock	10G acceleration peak to peak (11ms)
Rating	NEMA 4/IP 65 compliant front bezel
Certificate	Meet CE / FCC Class A
Mounting	Panel / VESA 75mm

Dimensions

