

# Rear Mount LCD

## Rear Mount LCD

12.1"

### Specifications

RoHS  
COMPLIANT  
2002/95/EC


|                                |                                |
|--------------------------------|--------------------------------|
| Model Name                     | R12L600-RMM2                   |
| Viewable Size Image            | 12.1"                          |
| Active Display Area(mm)        | 245.76(H)x184.32(V)            |
| Pixel Pitch(mm)                | 0.240(H)x0.240(V)(typ.)        |
| Number of Pixels               | 1024x768                       |
| Contrast Ratio                 | 500:1(typ.)                    |
| Display Color                  | 262,144(6bit/colors)           |
| Brightness(cd/m <sup>2</sup> ) | 400                            |
| Viewing Angle(CR>=10)          | 120(H);100(V)(typ.)            |
| Synchronization Range          |                                |
| Horizontal/Vertical            | 31.5~60.0KHz/60~75Hz           |
| Recommended Resolution         | 1024x768@60Hz, 75Hz            |
| Signal Connector               | 15 pin D-Sub                   |
| Power Source                   | AC100~240V, Universal, ±10%    |
| Power Consumption              | 20W typical, normal operation  |
| Power Management               | VESA DPMS Compliant            |
| Plug & Play                    | VESA DDC 1/2B                  |
| Optional Video Input           | S-Video, Composite             |
| Optional DVI Input             | No                             |
| Optional Touch Screen          | Resistive, Capacitive, SAW, IR |

Remarks: R10L200 series= VGA input only

R10L230 series= VGA+Video Input



### Mechanical Drawing

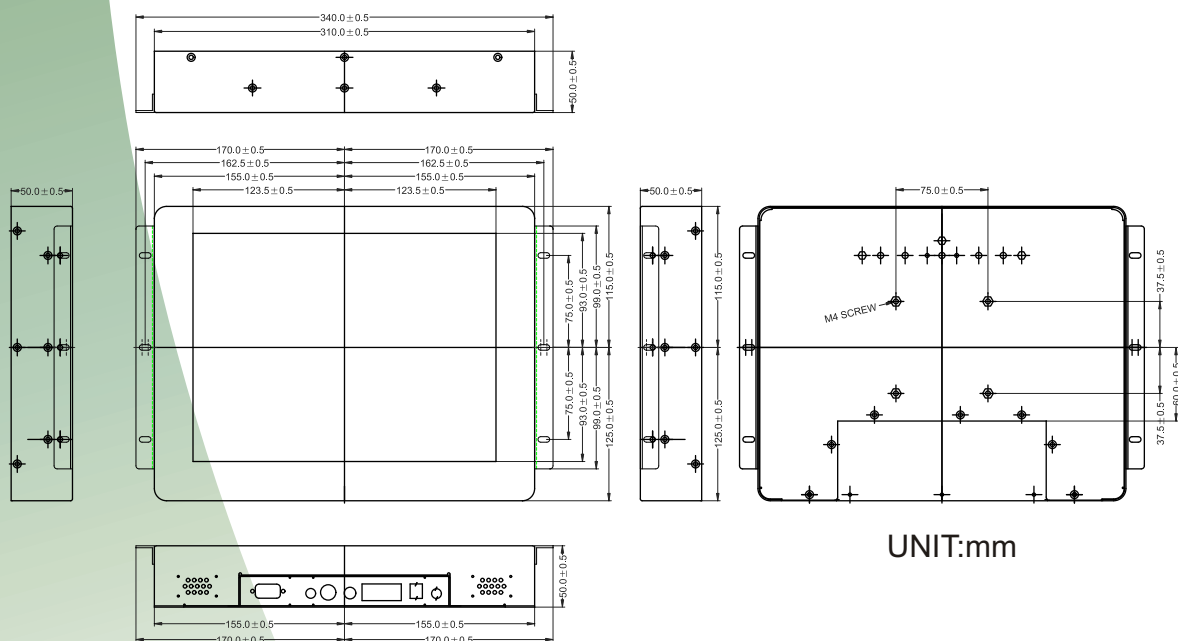

UNIT:mm

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.