


## Rear Mount LCD




## Specifications

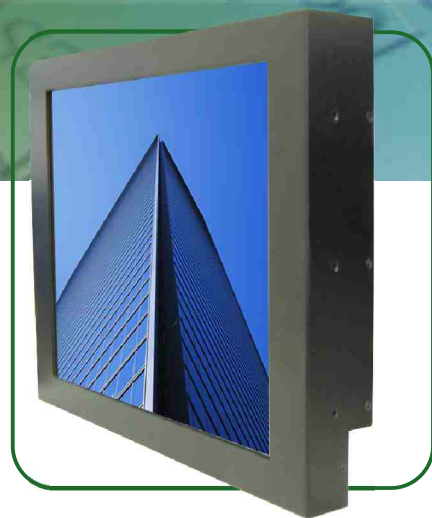

|                                |                               |
|--------------------------------|-------------------------------|
| Model Name                     | S17L500-RMM1                  |
| Viewable Size Image            | 17"                           |
| Active Display Area(mm)        | 337.92(H)x270.34(V)           |
| Pixel Pitch(mm)                | 0.264(H)x0.264(V)             |
| Number of Pixels               | 1280x1024                     |
| Contrast Ratio                 | 800:1(typ.)                   |
| Display Color                  | 16.7M(6bits+FRC)              |
| Brightness(cd/m <sup>2</sup> ) | 300(typ.)                     |
| Viewing Angle(CR>=10)          | -80~80(H);-80~80(V)           |
| Synchronization Range          | 31.5~80.0KHz/60~75Hz          |
| Horizontal/Vertical            |                               |
| Recommended Resolution         | 1280x1024@60Hz, 75Hz          |
| Signal Connector               | 15 pin D-Sub                  |
| Power Source                   | AC100~240V, Universal, ±10%   |
| Power Consumption              | 32W typical, normal operation |
| Power Management               | VESA DPMS Compliant           |
| Plug & Play                    | VESA DDC 1/2B                 |
| Optional Video Input           | S-Video, Composite            |
| Optional DVI Input             | Yes                           |
| Optional Touch Screen          | Resistive,Capacitive,SAW      |

\*R17 Dimension=530(W)x380(D)x60(H)  
S17 Dimension=480(W)x340(D)x65(H)  
UNIT:mm

## Mechanical Drawing

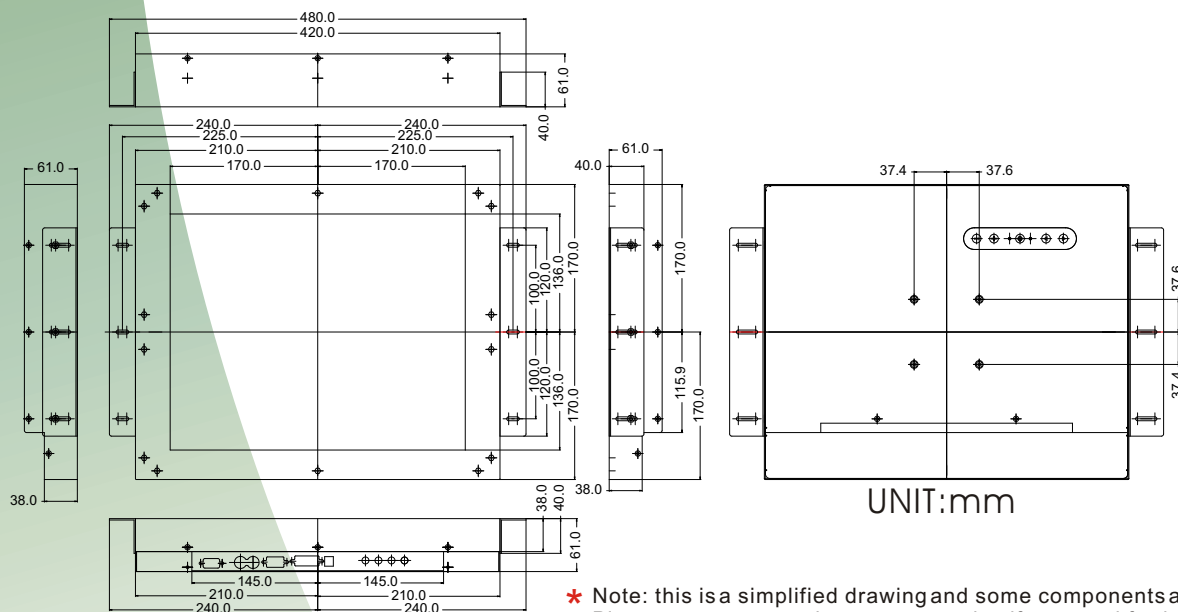

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.