

Open Frame LCD

Open Frame LCD

32"(16:9)

Specifications

RoHS
COMPLIANT
2002/95/EC

Model Name	W32L300-OFA1
Viewable Size Image	32"(16:9)
Active Display Area(mm)	697.685(H)x392.256(V)
Pixel Pitch(mm)	0.51075 (H) x 0.51075 (V)
Number of Pixels	1366x768
Contrast Ratio	3000:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m ²)	450(typ.)
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Synchronization Range	
Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1366x768@ 60Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	150w typical,normal,operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video/ Composite
Optional DVI Input	Yes
Optional Touch Screen	SAW

Remarks:W32L300 series= VGAinput only


W32L340 series= VGA+Video Input

*External adapter is default

*Build in power is optional



Mechanical Drawing

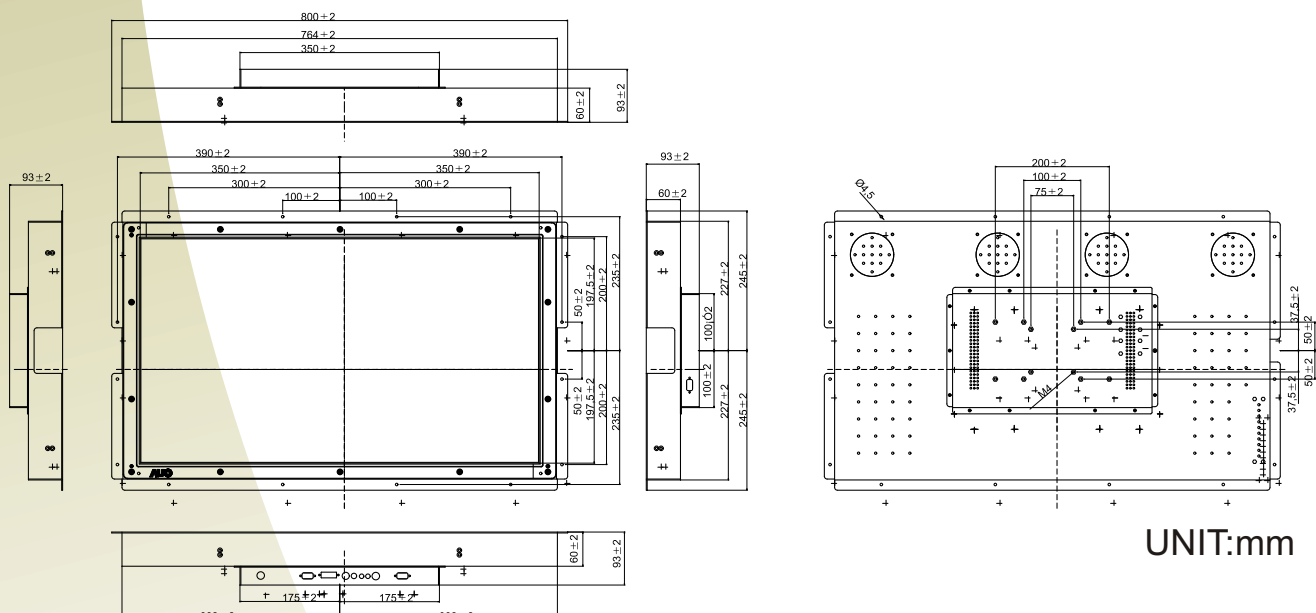

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	Spec Change	Mar-08-10