

Open Frame LCD

Open Frame LCD

10.1"(16:9)

Specifications





Model Name	W10L100-OFH1/W10L110-OFH1
Viewable Size Image	10.1"(16:9)
Active Display Area(mm)	220.416 (H) x 129.15 (V)
Display Resolution (pixel)	1024(H)x600(V)
Pixel Pitch(mm)	0.21525 (H) x 0.21525 (V)
Synchronization Range_ Horizontal / Vertical	31.5~46.9KHz / 60~75Hz
Recommended Resolution	1024x600@60Hz
Contrast Ratio	500:1 (typ.)
Brightness(cd/m ²)	250 (typ.)
Viewing Angle(CR>=10)	-70,70 (H); -60,50 (V)
Power Source	AC100~240V, Universal $\pm 10\%$
Power Consumption	10 W typical, normal operation
Power Management	VESA DPMS Compliant
Optional Video Input	S-Video, Composite
Plug & Play	Yes
Support Video Signal Type	NTSC/PAL
Optional DVI Input	No
Optional Touch Screen	4 Wire Resistive

Note: The LCD is aligned with Open Frame housing. There will be extra height with glass or touch.



Mechanical Drawing

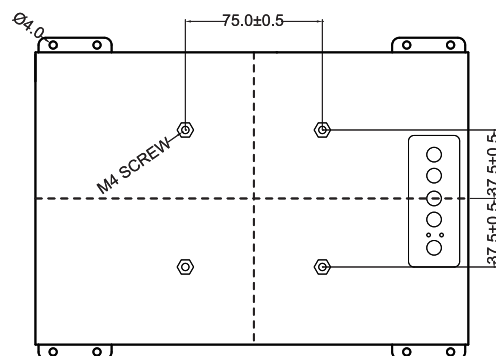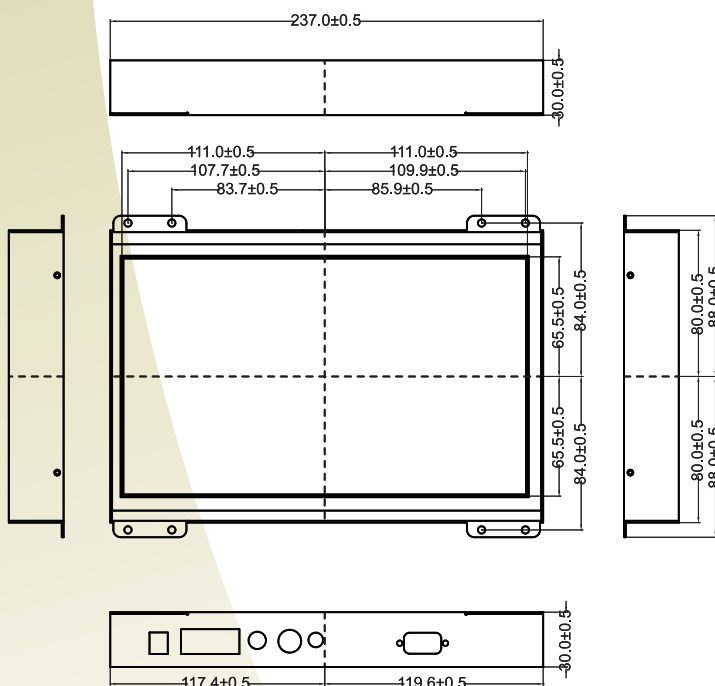

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First release	May-13-09
1.1	Spec / Drawing change	May-27-09
1.2	Drawing change	Sep-17-10