

Open Frame LCD

Open Frame LCD

15"

Specifications

Model Name	R15L100-OFA2HB (LED)
Viewable Size Image	15"
Active Display Area(mm)	304.128(H)x228.096(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	700:1(typ.)
Display Color	16.2M(6bit+FRC)
Brightness(cd/m) ²	900(typ.)
Viewing Angle(CR>=10)	-80~80(H);-60~80(V)
Response Time	8ms
Synchronization Range	31.5~60.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	15 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW, IR





Remarks:R15L100 series= VGA input only

R15L110 series= VGA+Video Input

RoHS
COMPLIANT
2002/95/EC



Mechanical Drawing

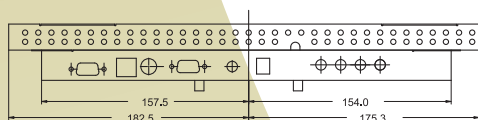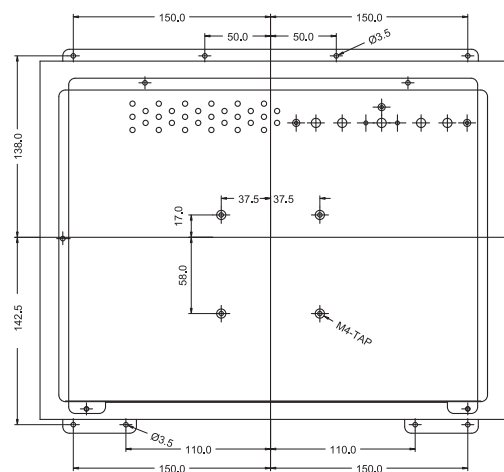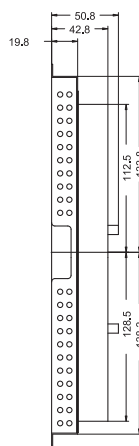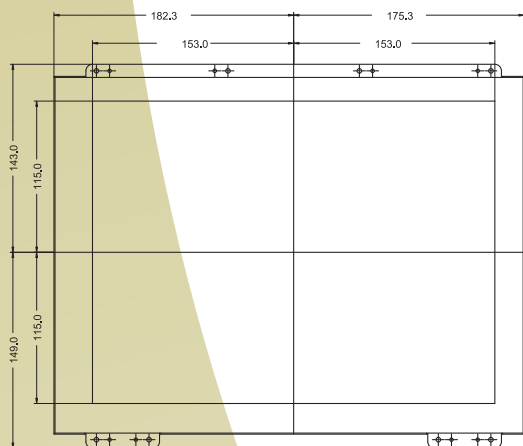

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail.
Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.2	Spec change	Sep-27-10
1.3	Pic change	Sep-28-10
1.4	Spec change	Oct-04-10