

# Open Frame LCD

## Open Frame LCD

10.4"

### Specifications

|                                |                               |
|--------------------------------|-------------------------------|
| Model Name                     | R10L200-OFU1                  |
| Viewable Size Image            | 10.4"                         |
| Active Display Area(mm)        | 211.2(H)x158.4(V)             |
| Pixel Pitch(mm)                | 0.264(H)x0.264(V)(typ.)       |
| Number of Pixels               | 800x600                       |
| Contrast Ratio                 | 600:1(typ.)                   |
| Display Color                  | 16.2M(8bit/colors)            |
| Brightness(cd/m <sup>2</sup> ) | 230                           |
| Viewing Angle(CR>=10)          | -70~70(H);-65~55(V)(typ.)     |
| Synchronization Range          | 31.5~46.9KHz/60~75Hz          |
| Horizontal/Vertical            |                               |
| Recommended Resolution         | 800x600@60Hz, 75Hz            |
| Signal Connector               | 15 pin D-Sub                  |
| Power Source                   | AC100~240V, Universal, ±10%   |
| Power Consumption              | 15W typical, normal operation |
| Power Management               | VESA DPMS Compliant           |
| Plug & Play                    | VESA DDC 1/2B                 |
| Optional Video Input           | S-Video, Composite            |
| Optional DVI Input             | No                            |
| Optional Touch Screen          | Resistive, SAW, IR            |


Remarks: R10L200 series= VGA input only

R10L230 series= VGA+Video Input

RoHS  
COMPLIANT  
2002/95/EC



### Mechanical Drawing

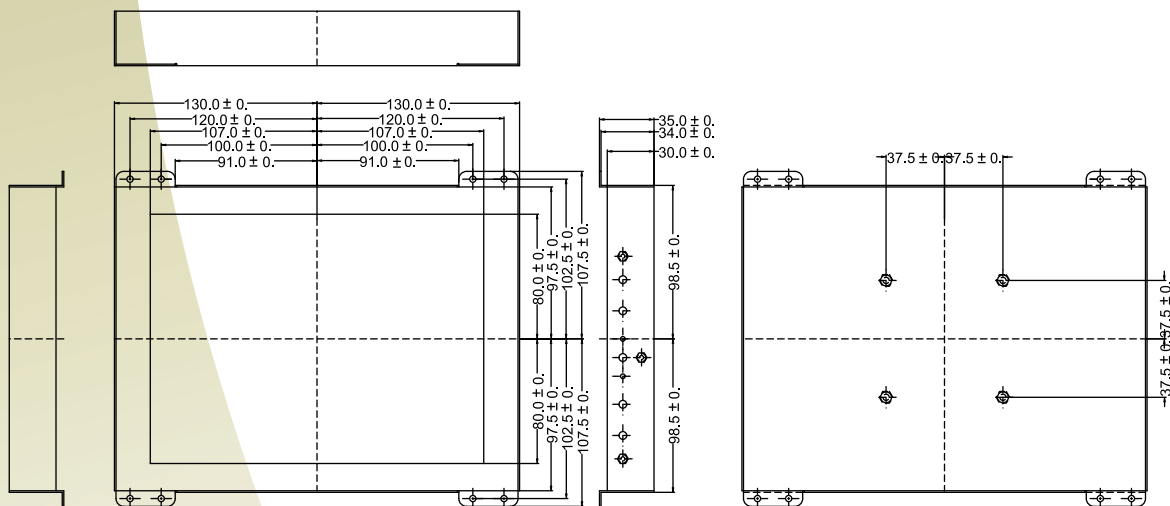

UNIT:mm

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.



CE FC

RoHS  
COMPLIANT  
2002/95/EC

| Rev. | Reasons     | Revised Date |
|------|-------------|--------------|
| 1.0  | Spec change | Apr-23-09    |