

Open Frame LCD

Open Frame LCD

6.5"

Specifications

RoHS
COMPLIANT
2002/95/EC


Model Name	R06L200-OFA1
Viewable Size Image	6.5"
Active Display Area(mm)	132.48(H)x99.36(V)
Pixel Pitch(mm)	0.207(H)x0.207(V)
Number of Pixels	640x480
Contrast Ratio	600:1(typ.)
Display Color	262,144(6bit/colors)
Brightness(cd/m ²)	700
Viewing Angle(CR>=10)	-80~80(H);-70~70(V)(typ.)
Synchronization Range	
Horizontal/Vertical	31.5~37.5KHz/60~75Hz
Recommended Resolution	640x480@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	15W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive

Remarks: R06L200 series= VGA input only

R06L230 series= VGA+Video Input



Mechanical Drawing

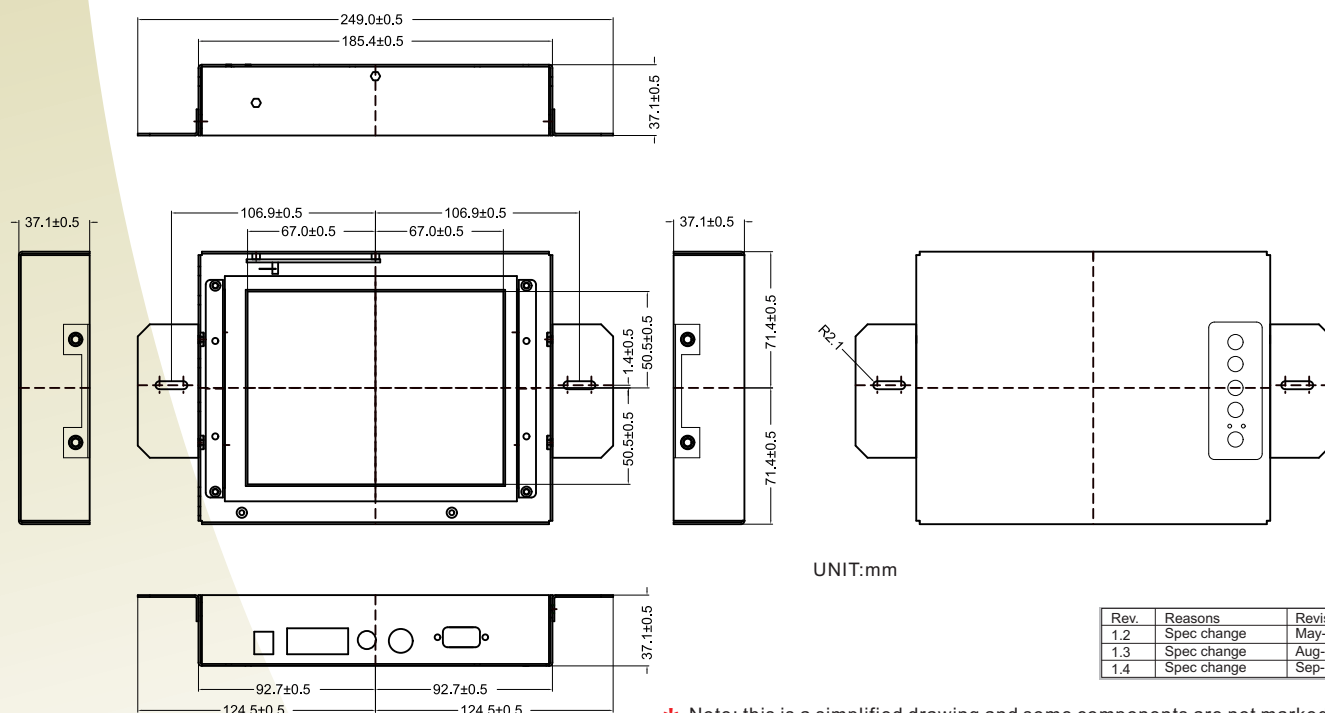

* Note: this is a simplified drawing and some components are not marked in detail.
Please contact our sales representative if you need further product information.