


Open Frame LCD

Open Frame LCD

15"

Specifications

RoHS
COMPLIANT
2002/95/EC



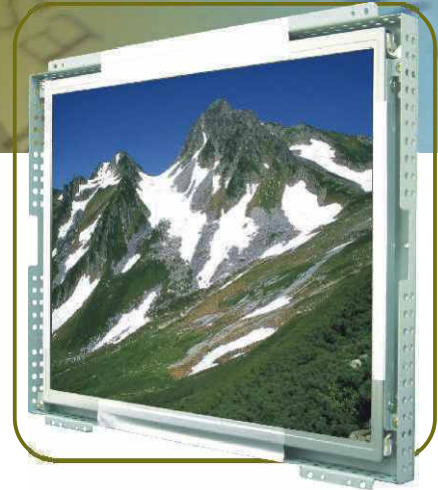


Model Name	R15L100-OFA2 (LED)
Viewable Size Image	15"
Active Display Area(mm)	304.128(H)x228.096(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	700:1(typ.)
Display Color	16.2M(6bit+FRC)
Brightness(cd/m) ²	350(typ.)
Viewing Angle(CR>=10)	-80~80(H);-60~80(V)
Response Time	8ms
Synchronization Range	31.5~60.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	15 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW, IR

Remarks: R15L100 series= VGA input only


R15L110 series= VGA+Video Input

Mechanical Drawing

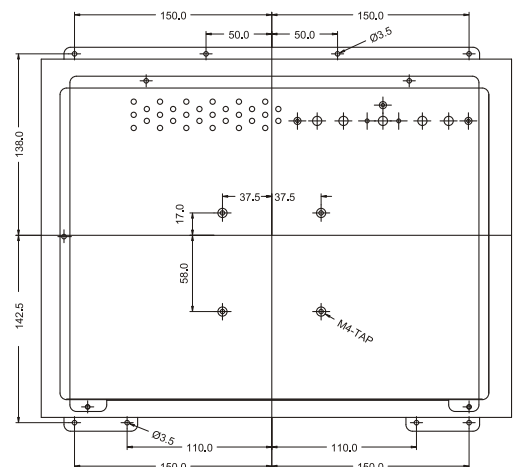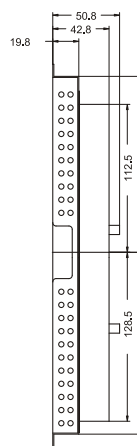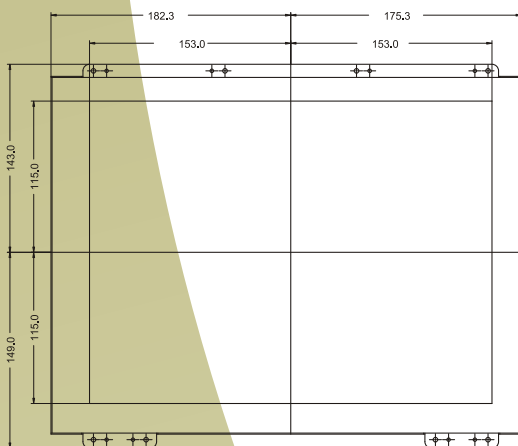

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

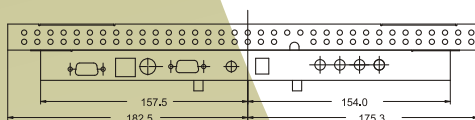

Rev.	Reasons	Revised Date
1.0	First release	Aug-26-09