

Sunlight Readable LCD

Sunlight Readable LCD (High-Brightness)



15"

Specifications

RoHS
COMPLIANT
2002/95/EC


Model Name	R15L100-OFM6HB
Viewable Size Image	15"
Active Display Area(mm)	304.1(H)x228.1(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	650:1(typ.)
Display Color	16.7M(8bits/color)
Brightness(cd/m ²)	1500(typ,4CCEL)
Viewing Angle(CR>=10)	-70~70(H);-60~50(V)
Synchronization Range	31.5~60.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	38W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite,DVI
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW, IR

When adding IR touch, the mechanical structure will change.

Remarks:R15L100 series= VGAinput only

R15L110 series=VGA+Video Input

Mechanical Drawing

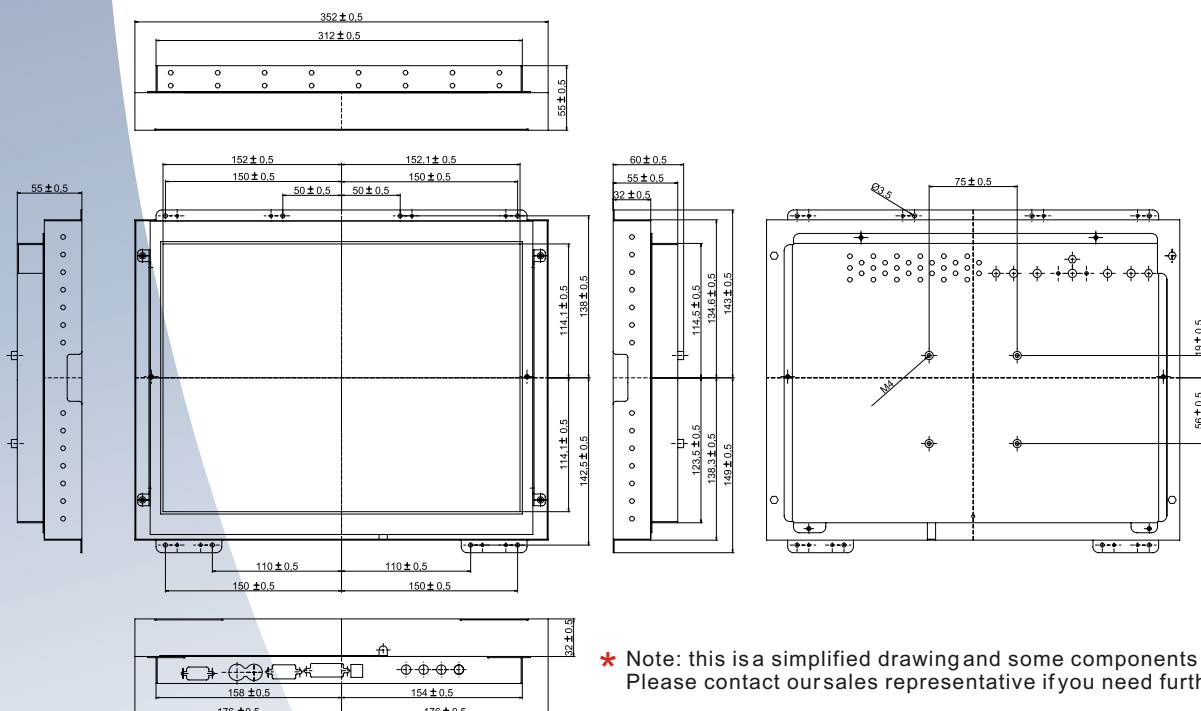

* Note: this is a simplified drawing and some components are not marked in detail.
Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	Spec Change	Dec-08-08