

# Chassis Monitor

## Chassis Monitor



10.4"

### Specifications


RoHS  
COMPLIANT  
2002/95/EC

Model Name	R10L100-CHA2
Viewable Size Image	10.4"
Active Display Area(mm)	211.2(H)x158.4(V)
Pixel Pitch(mm)	0.33 (H) x 0.33 (V)
Number of Pixels	640x480
Contrast Ratio	700:1 (typ.)
Display Color	16.2M (8bits/color)
Brightness(cd/m <sup>2</sup> )	450 (typ.)
Viewing Angle(CR>=10)	-80~80 (H); -80~60 (V)
Synchronization Range	
Horizontal/Vertical	31.5~37.5KHz / 60~75Hz
Recommended Resolution	640x480@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, $\pm 10\%$
Power Consumption	15 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, SAW, IR

Remarks: R10L100 = VGA input only

R10L110 = VGA + Video input

### Mechanical Drawing

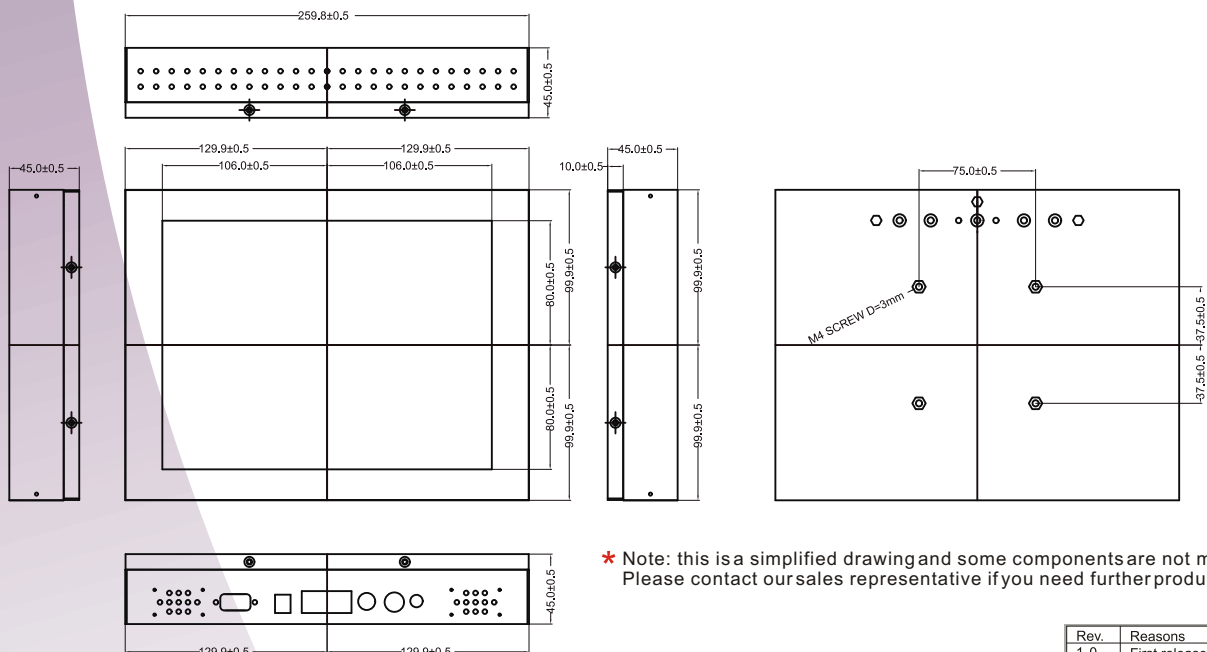

Rev.	Reasons	Revised Date
1.0	First release	Oct-20-09