

Chassis Monitor (LED Backlight)



32"(16:9)

Specifications

RoHS
COMPLIANT
2002/95/EC


Model Name	W32L300-CHA3 / W32L340-CHA3
Viewable Size Image	32"(16:9)
Active Display Area(mm)	698.4 (H) x 392.85 (V)
Pixel Pitch(mm)	0.3638
Number of Pixels	1920x1080
Contrast Ratio	4000:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m ²)	400(typ.)
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Synchronization Range	
Horizontal/Vertical	47~63KHz / 60~73Hz
Recommended Resolution	1920x1080@ 60Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	75w typical,normal,operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video/ Composite
Optional DVI Input	Yes
Optional Touch Screen	SAW

W32L300 = VGA only/ VGA+DVI

W32L340 = (VGA only/ VGA+DVI) + VIDEO input

*External adapter is default

Mechanical Drawing

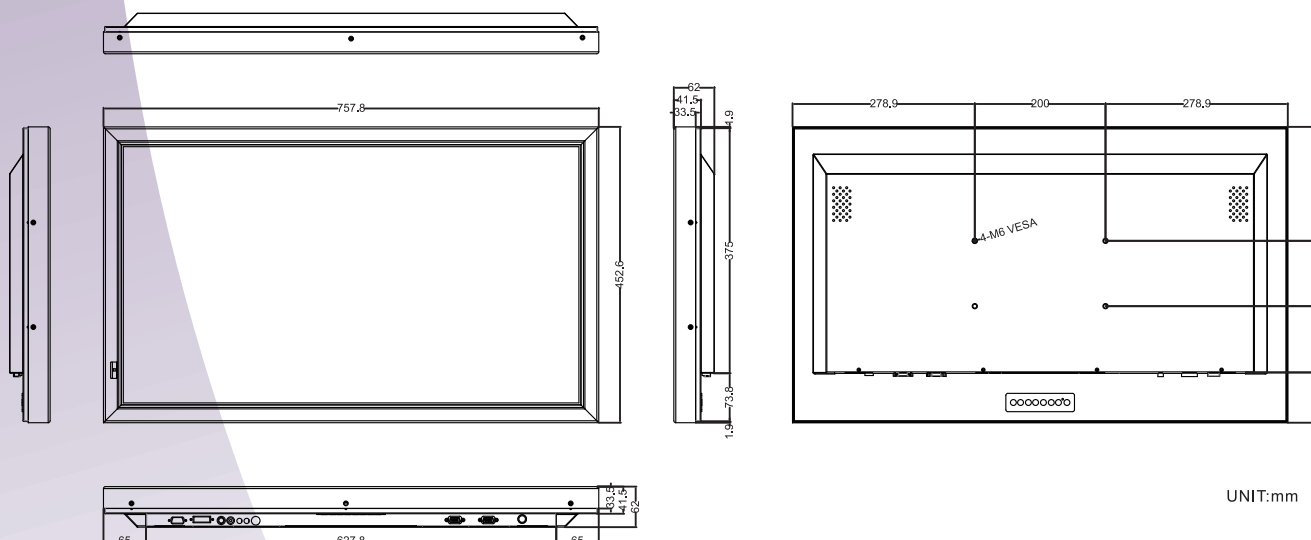

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail.
Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First release	Sep-27-10
1.1	Drawing change	Oct-04-10