

Chassis Monitor



Specifications




Model Name	R08L100-CHM2
Viewable Size Image	8.4"
Active Display Area(mm)	171.264(H)x128.448(V)
Pixel Pitch(mm)	0.16725(H)x0.16725(V)(typ.)
Number of Pixels	1024x768
Contrast Ratio	400:1(typ.)
Display Color	260K(6bit/colors)
Brightness(cd/m ²)	300
Viewing Angle(CR>=10)	-65~65(H);-50~60(V)
Synchronization Range	31.5~60.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, SAW

Remarks:R08L100 series= VGAINput only

R08L110 series=VGA+Video Input

Mechanical Drawing

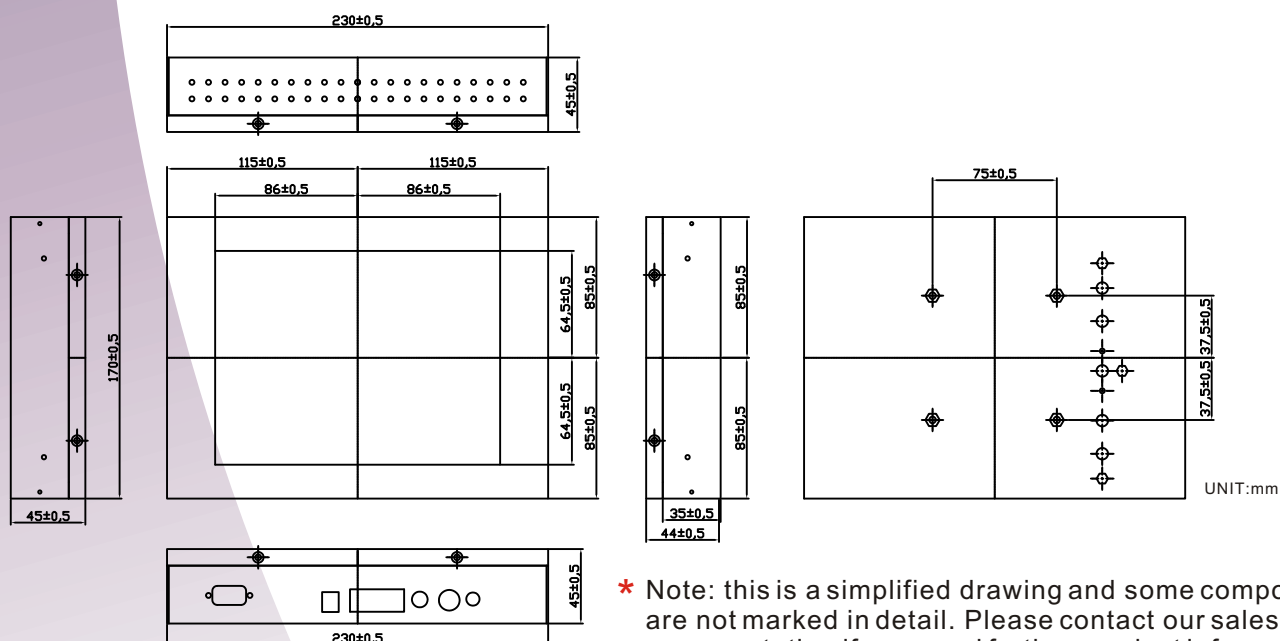

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.