

# Chassis Monitor

## Chassis Monitor



20"

### Specifications



**RoHS**  
COMPLIANT  
2002/95/EC

|                                |                               |
|--------------------------------|-------------------------------|
| Model Name                     | R20L100-CHA2-2                |
| Viewable Size Image            | 20.1"                         |
| Active Display Area(mm)        | 408.0(H)x306.0(V)             |
| Pixel Pitch(mm)                | 0.255(H)x0.255(V)             |
| Number of Pixels               | 1600x1200(UXGA)               |
| Contrast Ratio                 | 1000:1(typ.)                  |
| Display Color                  | 16.7M(8bit/colors)            |
| Brightness(cd/m <sup>2</sup> ) | 300                           |
| Viewing Angle(CR>=10)          | -89~89(H);-89~89(V)           |
| Synchronization Range          |                               |
| Horizontal/Vertical            | 31.5~80.0KHz/60~75Hz          |
| Recommended Resolution         | 1600x1200@ 60Hz               |
| Signal Connector               | 15 pin D-Sub                  |
| Power Source                   | AC100~240V, Universal, ±10%   |
| Power Consumption              | 60W typical, normal operation |
| Power Management               | VESA DPMS Compliant           |
| Plug & Play                    | VESA DDC 1/2B                 |
| Optional Video Input           | S-Video, Composite            |
| Optional DVI Input             | Yes                           |
| Optional Touch Screen          | SAW, Resistive                |

Remarks: R20L100series= VGA Input only

R20L110 series=VGA+Video Input

### Mechanical Drawing

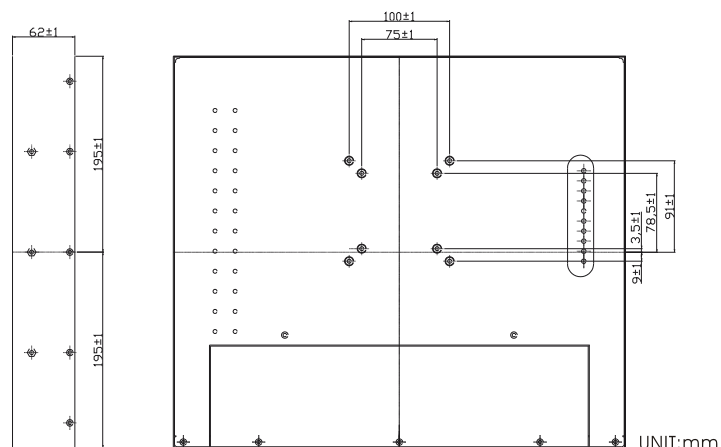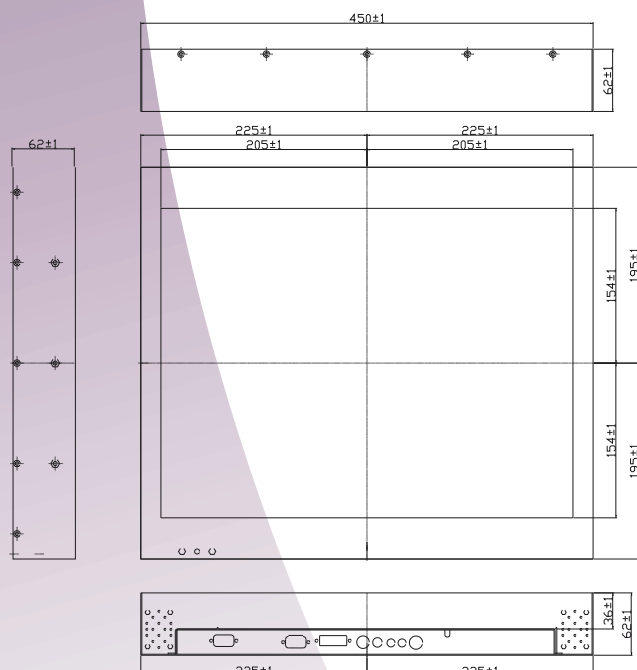

UNIT:mm

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.