

Rugged Display

G-WIN®


Model:W12L100-VMM9

Product Features:

- High Quality 12.1" Wide panel
- 4 Wire resistive touch screen
- Compliance With EN50155
- -20 ~ +55°C Wide Range Operating Temperature
- Anti-Corrosion housing with Fanless Design
- 9V ~ 36V DC Isolation Wide Range Power Input




CE FCC

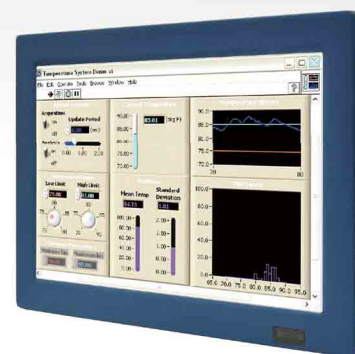

Product Specifications:


Display	Model Name	W12L100-VMM9
	Size	12.1"
	Resolution (pixels)	1280 x 800
	Number of Colors	262K colors (RGB 6bits)
	Brightness (cd/m2)	500
	Contrast Ratio	600:1
	Viewing Angle	-80~80 (H) ; -80~80 (V)
	Active Area	261.12 (H) x 163.2 (V)
Input / Output	Touch (optional)	4 wire resistive
	1 x VGA (DB-15)	
	1 x DC-in Terminal Block (default)	
	1 x RS232 for Touch Screen	
Environment	Operating Temperature	-20 ~55°C
	Storage Temperature	-30 ~70°C
	Humidity	10 ~ 95% non-condensing
	Shock	EN50155
	Vibration	EN50155
	EMC	CE, FCC ClassB, Compliance with EN50155
	Safety	Compliance with EN50155, MIL-STD 810F
Mechanical	Dimension(W x H x D)	310 x 215 x 45mm
Packing List	R2A AD Board User's Manual Touch's Driver CD	

I / O View:

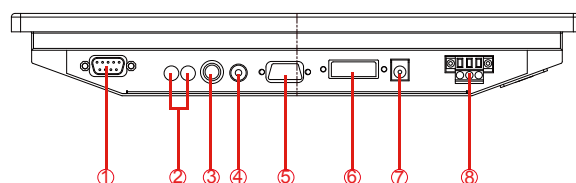

1. RS-232 for Touch(Optional)
2. Line out(Optional)
3. S-Video(Optional)
4. CVBS(Optional)
5. VGA
6. DVI-D
7. DC Lockable input(Optional)
8. 9~36V DC Terminal Block(Default)

Front OSD Control Function:

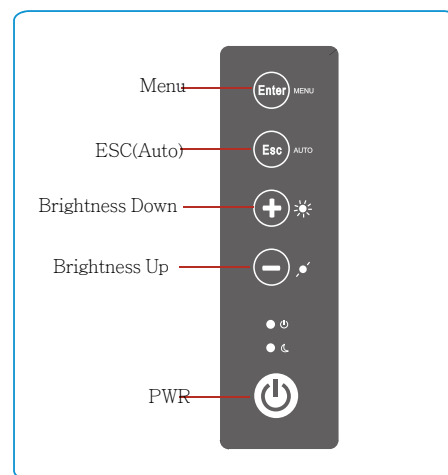

Back View

Drawing w / Mounting bracket:

