

Rear Mount LCD

Wide Temperature Range LCD

10.4"

Specifications

RoHS
COMPLIANT
2002/95/EC


Model Name	R10L600-RMP1WT
Viewable Size Image	10.4"
Active Display Area(mm)	211.2(H)x158.4(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)(typ.)
Number of Pixels	800x600
Contrast Ratio	500:1(typ.)
Display Color	262,144(6bit/colors)
Brightness(cd/m ²)	350(typ.)
Viewing Angle(CR>=10)	-60~60(H);-60~40(V)
Synchronization Range	
Horizontal/Vertical	31.5~46.9KHz/60~75Hz
Recommended Resolution	800x600@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	18W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, SAW, IR
System Operating Temp	-20°C~55°C(Operating) -20°C~55°C(Storage)

Remarks: R10L600 series= VGA input only

R10L630 series= VGA+Video Input



Mechanical Drawing

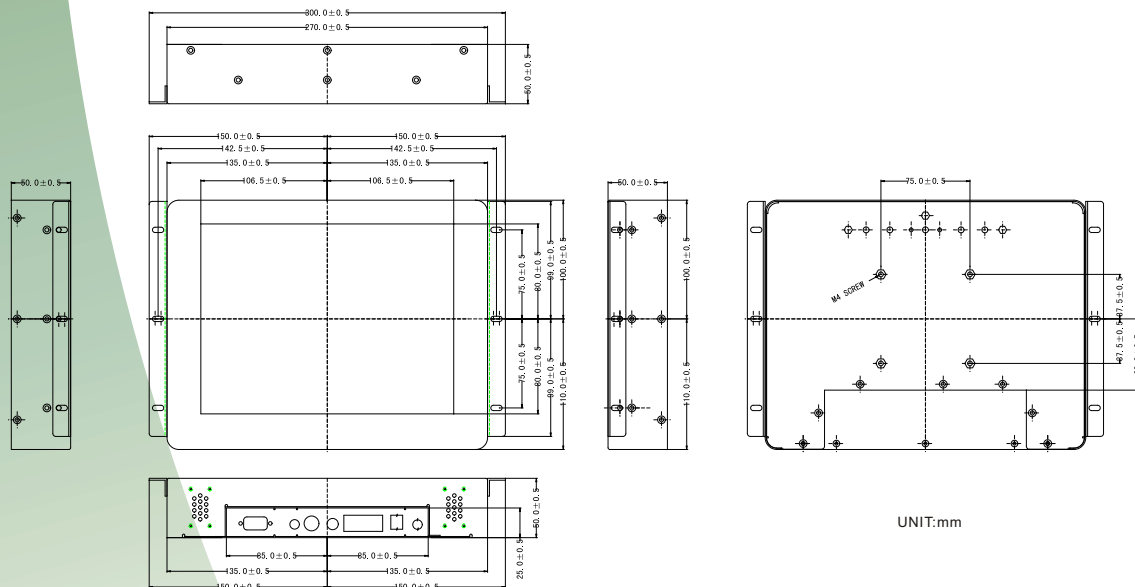

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail.
Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First release	Jul-14-10