

Sunlight

Readable LCD

Sunlight Readable LCD

47"

Specifications

RoHS
COMPLIANT
2002/95/EC

Model Name	W47L100-CHL1TR
Viewable Size Image	47"(16:9)
Active Display Area(mm)	1039.68(H)x584.82(V)
Pixel Pitch(mm)	0.5415x0.5415
Number of Pixels	1920x1080
Contrast Ratio	1000:1(typ.)
Display Color	16.7M(8bits/color)
Brightness(cd/m ²)	625(typ.)
Viewing Angle(CR>=10)	-89~89(H); -89~89(V)
Synchronization Range	31.5~60KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1920x1080@60Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	220W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video/ Composite
Optional DVI Input	Yes
Optional Touch Screen	No
Optional protection glass(reflection rate<0.5%)	Optional
Operation Temperature	0°C~50°C

Outdoor readability


Ambient light(nit)	Brightness measure Angle	10,000	30,000	80,000
Brightness gain(BLoff)(nit)	35°	600	770	1060
Reflectance(net)(%)		1.00	0.90	0.70

Remarks: W47L100 series= VGA Input only
W47L110 series= VGA+Video Input

*Build in power is default

Specifications are subject to change without notice.
Reflectance rate will change by LCD panel ITO glass design and coating ratio.

Mechanical Drawing

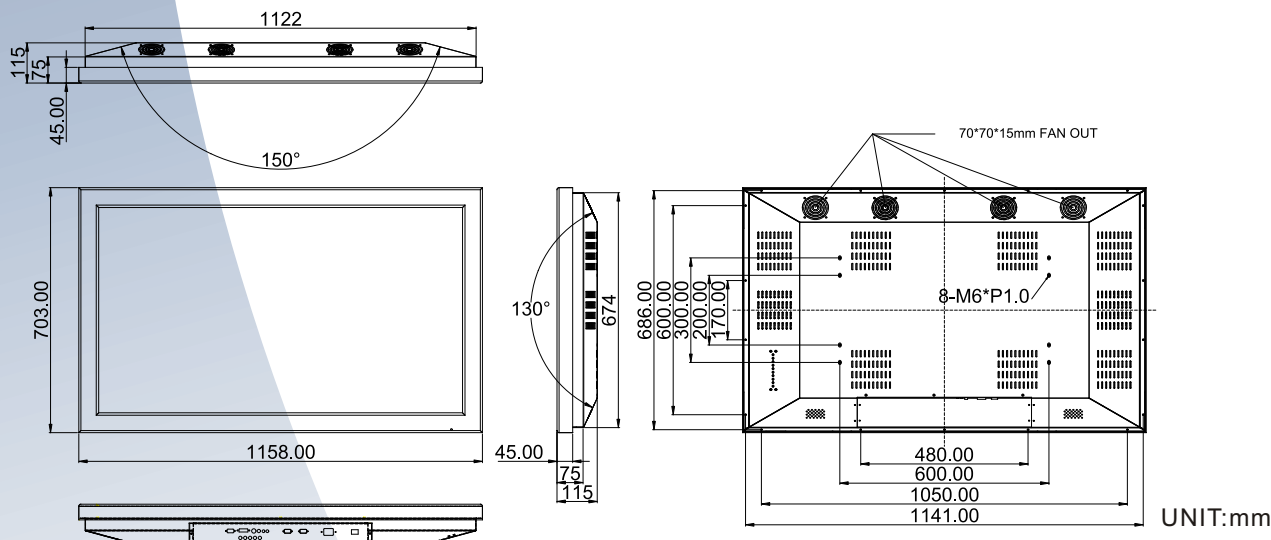

* Note: this is a simplified drawing and some components are not marked in detail.
Please contact our sales representative if you need further product information.

