

Sunlight

Readable LCD

Sunlight Readable LCD (REAR MOUNT)

15"

Specifications

RoHS
COMPLIANT
2002/95/EC

Model Name	R15T600-RMA1TR
Viewable Size Image	15"
Active Display Area(mm)	304.128(H)x228.096(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	500:1(typ.)
Display Color	16.2M(6bits+FRC)
Brightness(cd/m ²)	610 *
Viewing Angle(CR>=10)	-70~70(H);-50~70(V)
Synchronization Range	31.5~60.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	35W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW, IR
Optional protection glass(reflection rate<0.5%)	Optional
Operation Temperature	0°C~50°C

Outdoor readability **

Ambient light(nit)	Brightness measure Angle	15,000	30,000	80,000
Brightness gain(nit)	35°	120	210	480
Reflectance(net)(%)		0.8%	0.7%	0.6%

Remarks: R15T600 series= VGA Input only


R15T630 series= VGA+Video Input

Specifications are subject to change without notice.

Reflectance rate will change by LCD panel ITO glass design and coating ratio.

- * : Average brightness measured at center point under bright after enhancement.
Actual number may deviate from this number due to original panel's brightness deviation.
- ** : Expected brightness number in different ambient environment.
Simulated brightness number for reference.

Mechanical Drawing

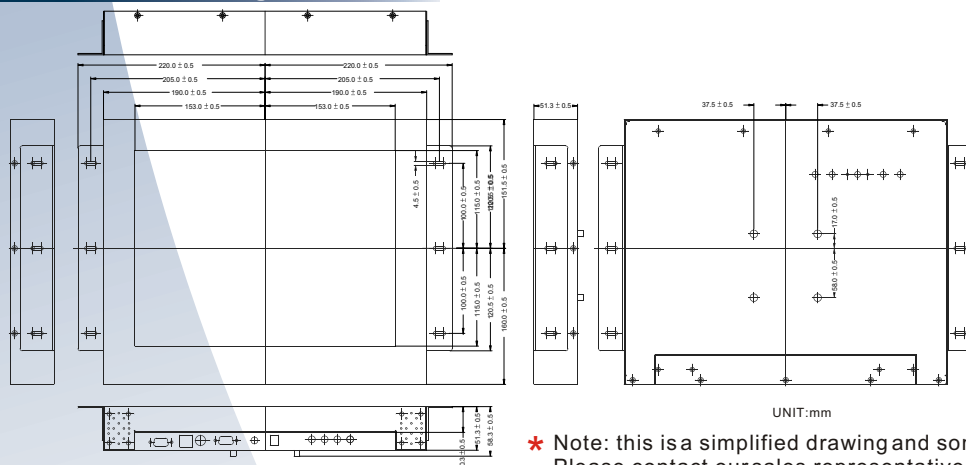

* Note: this is a simplified drawing and some components are not marked in detail.
Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First release	Sep-25-08
1.1	Spec change	Aug-16-10
1.2	Pic change	Aug-30-10

