

Stainless Chassis LCD

Stainless Chassis LCD IP22 design based

21.5" (16:9)

Specifications

RoHS
COMPLIANT
2002/95/EC

Model Name	W22L100-SCA1/W22L110-SCA1
Viewable Size Image	21.5"(16:9)
Active Display Area(mm)	476.64 (H) x 268.11 (V)
Pixel Pitch(mm)	0.248(per one triad)(H) x 0.248(V)
Number of Pixels	1920x1080
Contrast Ratio	1000:1(typ.)
Display Color	16.7M(8bit/color)
Brightness(cd/m ²)	300(typ.)
Viewing Angle(CR>=10)	170 (H); 160 (V)
Synchronization Range	
Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1920x1080 @ 60Hz
Signal Connector	15 pin D-sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	50W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive

Remarks: W22L100 series= VGA input only


W22L110 series= VGA+Video Input

★ note: IP65 is not possible



IP22 design based

Mechanical Drawing

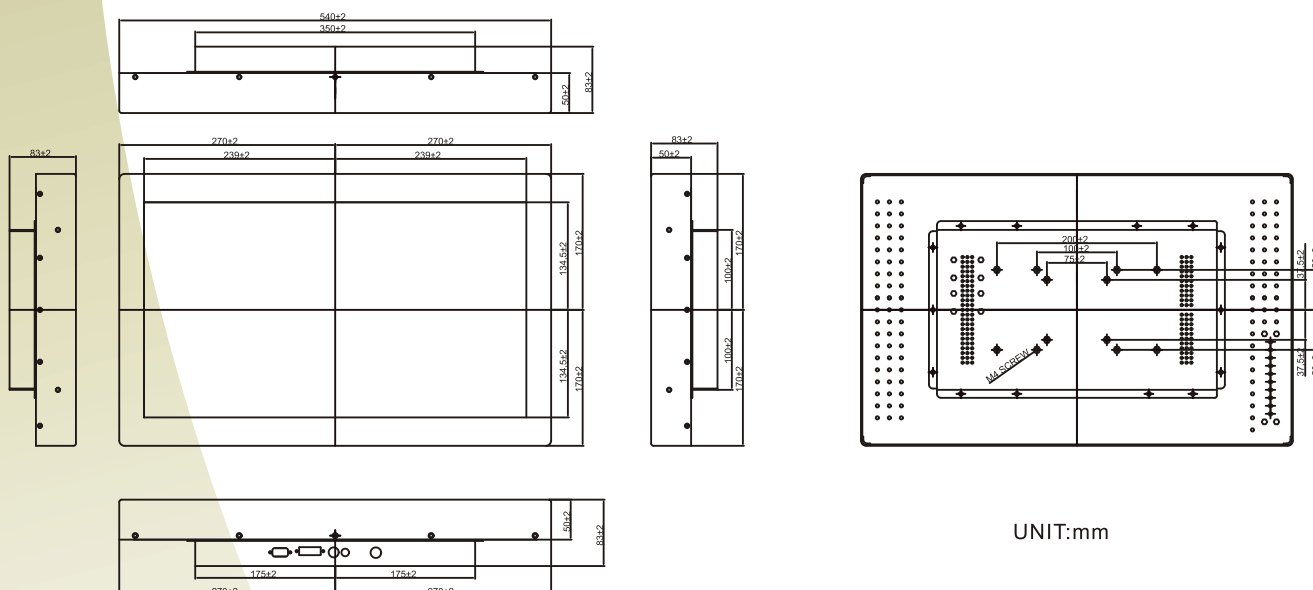

UNIT:mm

★ Note: this is a simplified drawing and some components are not marked in detail.
Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First release	Jan-29-10
1.1	Spec change	Feb-08-10