

Stainless Chassis LCD

Stainless Chassis LCD



17"

Specifications


RoHS
COMPLIANT
2002/95/EC

Model Name	R17L500-SCM1
Viewable Size Image	17"
Active Display Area(mm)	337.92(H)x270.34(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)
Number of Pixels	1280x1024
Contrast Ratio	800:1(typ.)
Display Color	16.7M(6bits+FRC)
Brightness(cd/m ²)	300(typ.)
Viewing Angle(CR>=10)	-80~80(H);-80~80(V)
Synchronization Range	
Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1280x1024@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	32W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive

Remarks: R17L500 series= VGA Input only

R17L540 series= VGA+Video Input

Mechanical Drawing

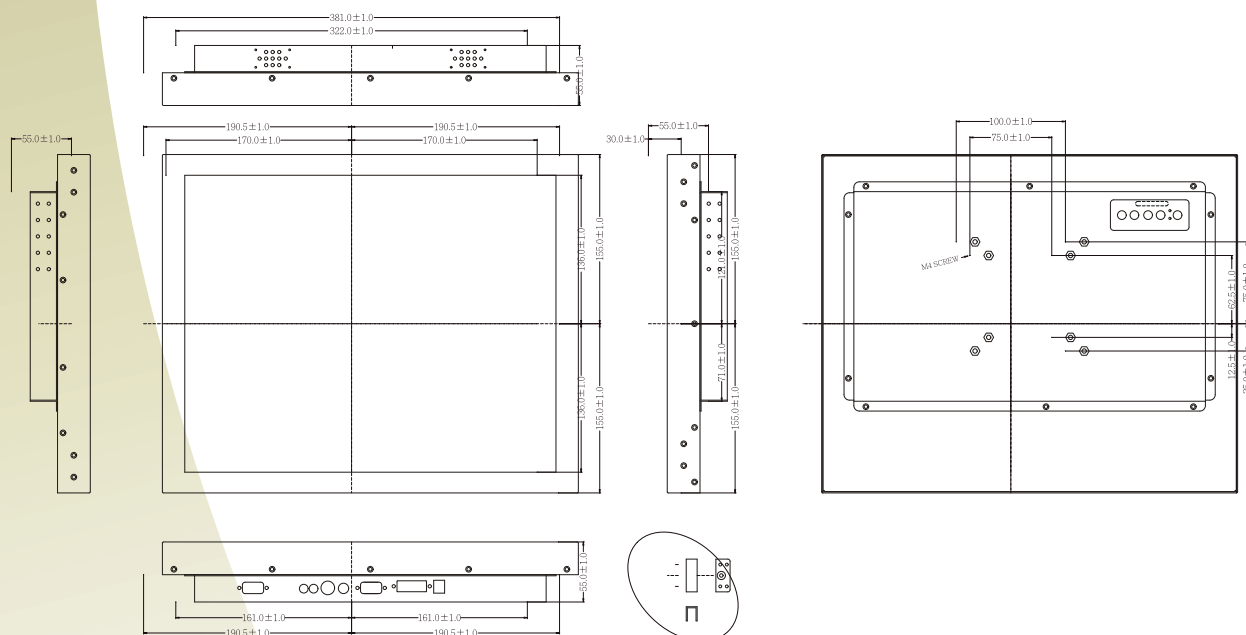

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First release	Jul-27-09
1.0	Spec chang	Sep-28-09