

Open Frame LCD

Open Frame LCD



10.4"

Specifications


RoHS
COMPLIANT
2002/95/EC

Model Name	R10L100-OFT2
Viewable Size Image	10.4"
Active Display Area(mm)	210.432 (H) x 157.824 (V)
Pixel Pitch(mm)	0.2055 (H) x 0.2055 (V)(typ.)
Number of Pixels	1024x768
Contrast Ratio	600:1(typ.)
Display Color	262,144 (6bits/color)
Brightness(cd/m ²)	300 (typ.)
Viewing Angle(CR>=10)	-89~89 (H); -89~89 (V)
Synchronization Range	31.5~60KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, $\pm 10\%$
Power Consumption	15W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive

Remarks: R10L100 series= VGA input only

R10L110 series= VGA+Video Input

Mechanical Drawing

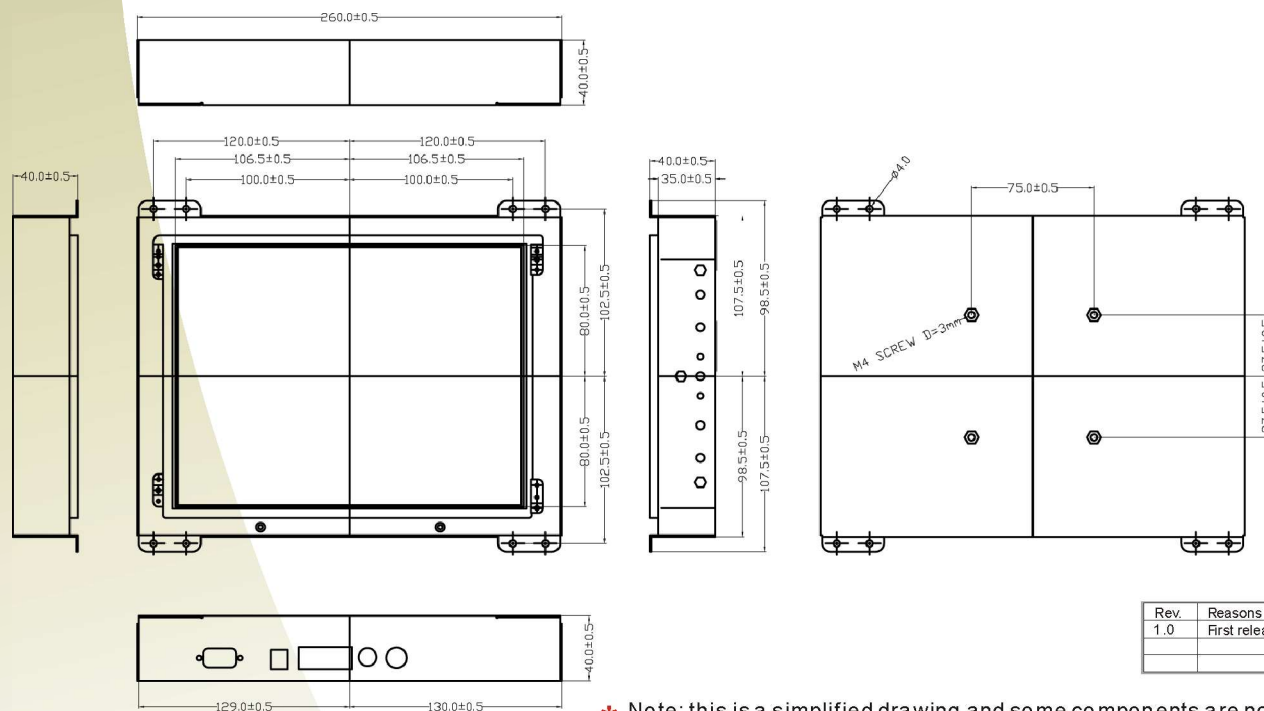

Rev.	Reasons	Revised Date
1.0	First release	Jan-11-09

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.