
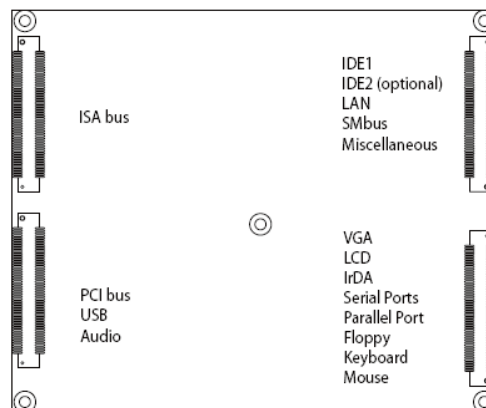


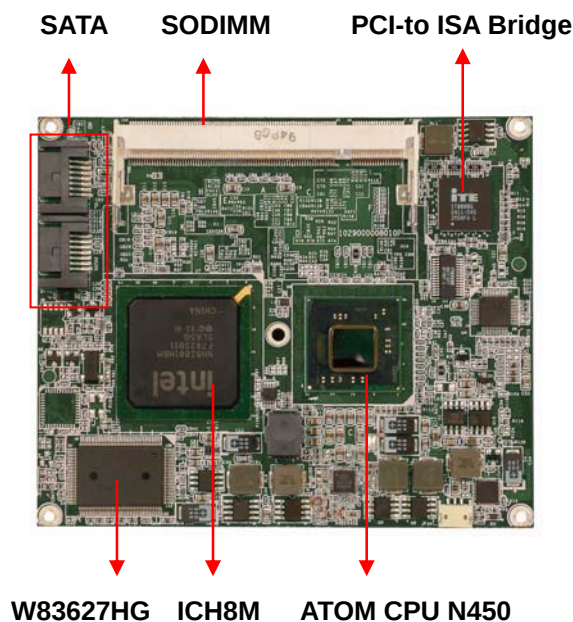

Specifications

- **CPU:** Intel ATOM Pineview N450 1.6G CPU
- **System chip:** Intel N450+ ICH8M + W83627HG
- **BIOS:** Phoenix-Award BIOS
- **DRAM:** 1 x 200-pin DDR2 SODIMM-400/533 max. up to 1GB
- **LVDS / CRT display:** LVDS with single channel 18 bit channel mode up to UXGA 1280x800, CRT up to 1400x 1050 @ 60Hz
- **100/10M Ethernet x 1:** Realtek 8103EL 100/10M LAN
- **Audio:** ALC888 7.1 Channel HD Codec
- **USB2.0 x 4:** USB2.0 x 4
- **COM x 2:** RS-232/422/485x1 + RS-232x1
- **Expansion Interface:** 4 x PCI master & ISA
- **Battery:** Lithium 3V / 196mAh
- **PS/2 K/B:** Keyboard x1
- **PS/2 MS:** Mouse x 1
- **EIDE PATA-100 x 1**
- **SATA Port x 2**
- **Parallel Port:** SPP/EPP/ECP mode
- **Floppy:** FDD shared with Parallel Port
- **WDT:** Reset supported; 255 levels
- **Power Requirement:** 12V, 5V & 3.3V voltage
- **Dimension:** 114mmx 95mm ETX Module
- **Operating Temperature:** -20 to 70℃, operation

Features

Intel N450 + ICH8M + W83627, SO-DIMM, LVDS / CRT, 100/10M LANx1, 7.1 CH HD Audio, USB2.0x4, COMx2, RS-232/422/485, PCI Masterx4, ISA bus, KB/MS, IDEx1, SATAx2, LPT / FDD, WDT, -20℃ ~ +70℃

Packing List

1x CD
1x QIG