

Open Frame LCD

Open Frame LCD



21.6" (16:9)

Specifications


RoHS
COMPLIANT
2002/95/EC

Model Name	W22L100-OFA2
Viewable Size Image	21.6" (16:9)
Active Display Area (mm)	477.417 (H) x 268.416 (V)
Pixel Pitch (mm)	0.1165 (H) x 0.3495 (V)
Number of Pixels	1366x768
Contrast Ratio	2000:1 (typ.)
Display Color	16.7M (8bit/color)
Brightness (cd/m ²)	300
Viewing Angle (CR ≥ 10)	-88~88 (H); -88~88 (V)
Synchronization Range	
Horizontal/Vertical	31.5~60.0KHz / 60~75Hz
Recommended Resolution	1366x768 @ 60Hz
Signal Connector	15 pin D-sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	50W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive

Remarks: W22L100 series= VGA input only

W22L110 series= VGA+Video Input

Mechanical Drawing

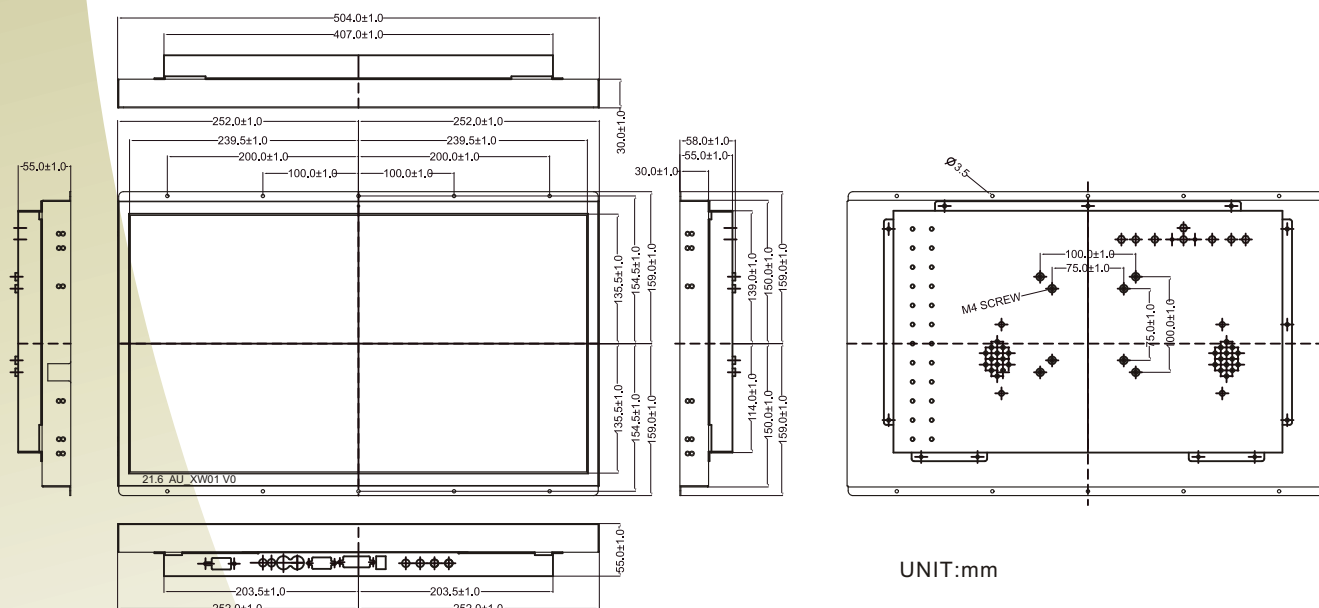

* Note: this is a simplified drawing and some components are not marked in detail.
Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First release	May-25-09
1.1	Spec change	Oct-22-09