

Open Frame LCD

Open Frame LCD



65"(16:9)

Specifications

RoHS
COMPLIANT
2002/95/EC


Model Name	W65L100-OFS1/W65L110-OFS1
Viewable Size Image	65"(16:9)
Active Display Area(mm)	1428.48(H)x803.52(V)
Pixel Pitch(mm)	0.744X0.744
Number of Pixels	1920x1080
Contrast Ratio	2000:1(typ.)
Display Color	1073.7M (10bits/color)
Brightness(cd/m ²)	700 (typ.)
Viewing Angle(CR>=10)	-89~89 (H); -89~89 (V)
Synchronization Range	
Horizontal/Vertical	31.5~80.0KHz / 60Hz
Recommended Resolution	1920x1080@ 60Hz
Signal Connector	15 pin D-Sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	420 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video/ Composite
Optional DVI Input	Yes
Optional Touch Screen	No

Remarks:W65L100 series= VGA input only

W65L110 series= VGA+Video Input

*Build in power is default

Mechanical Drawing

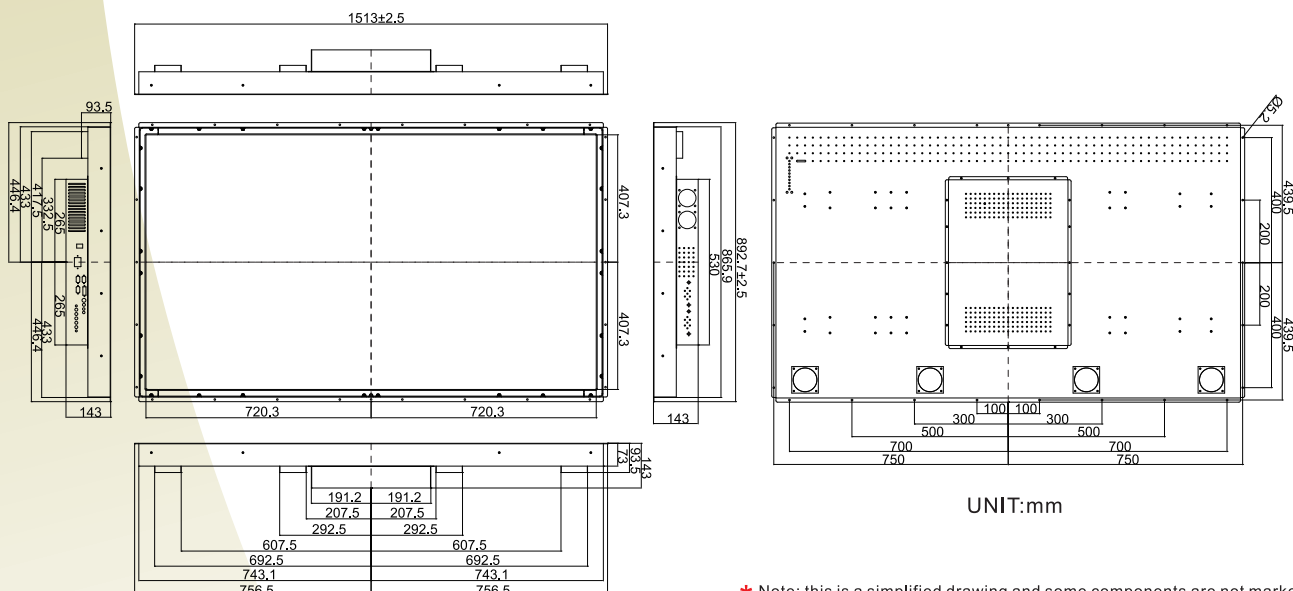

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First release	Feb-11-10
1.1	Drawing change	Sep-30-10